SGM820xQ
High-Accuracy Supervisory Circuit with Programmable Watchdog Timer

GENERAL DESCRIPTION

The SGM820xQ is a family of high-accuracy supervisory circuits with programmable watchdog timer. It provides three under-voltage threshold voltage options of 1.674V, 2.325V and 3.069V (TYP) for 1.8V, 2.5V and 3.3V system rail voltage monitoring. Besides, the nRESET delay of the SGM820xQ has a high-precision delay timing. And combined with its accurate voltage monitoring hysteresis, the SGM820xQ is very suitable for strict tolerance systems.

The SGM820xQ has a programmable watchdog timer. Users can program the timeouts through an external capacitor or the default factory settings. In addition, users can disable the watchdog through logic pins to prevent accidental timeouts during development.

This device is AEC-Q100 qualified (Automotive Electronics Council Standard Q100 Grade 1) and the use of this device is suitable for automotive applications.

The SGM820xQ is available in Green TDFN-3×3-8GL and TDFN-2×2-8DL packages. It operates over an ambient temperature range of -40℃ to +125℃.

TYPICAL APPLICATION

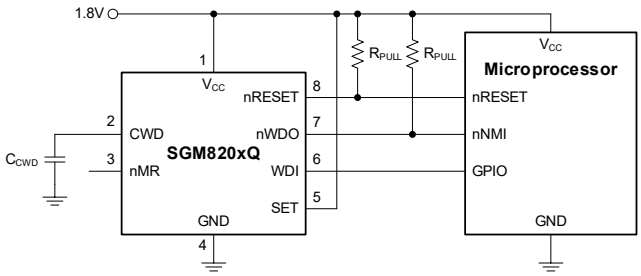


Figure 1. Typical Application Circuit

FEATURES

- **AEC-Q100 Qualified for Automotive Applications**
  Device Temperature Grade 1
  T_A = -40℃ to +125℃
- **Precision Fixed Detection Options:**
  - **V_{ITN} = 1.674V (TYP) for 1.8V System**
  - **V_{ITN} = 2.325V (TYP) for 2.5V System**
  - **V_{ITN} = 3.069V (TYP) for 3.3V System**
- **High-Accuracy Voltage Threshold (< 1.2%)**
- **Hysteresis Characteristics: 0.5% (TYP)**
- **Supply Voltage Range: 1.6V to 6.5V**
- **Ultra-Low Supply Current: 1.2μA (TYP)**
- **High-Accuracy Reset Delay**
- **High-Accuracy User-Programmable Watchdog Timer:**
  - **Standard Version: SGM820A-xQ**
  - **Extended Version: SGM820B-xQ**
- **Watchdog Disable Function**
- **Available Manual Reset Input (nMR)**
- **Open-Drain nRESET Output**
- **Available in Green TDFN-3×3-8GL and TDFN-2×2-8DL Packages**

APPLICATIONS

Safety Applications
Automotive Applications
Precision Industrial System
Controllers
DSPs, FPGAs and ASICs

代理商 威尔达 www.viswie.com 联系电话 138 2526 5270

PACKAGE/ORDERING INFORMATION

MODEL	UNDER-VOLTAGE THRESHOLD (V)	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM820A-3.0Q	3.069	TDFN-3×3-8GL	-40°C to +125°C	SGM820A-3.0QTGS8G/TR	06WTGS XXXXX YYYYYY	Tape and Reel, 4000
		TDFN-2×2-8DL	-40°C to +125°C	SGM820A-3.0QTGT8G/TR	06Y XXXX	Tape and Reel, 3000
SGM820B-3.0Q	3.069	TDFN-3×3-8GL	-40°C to +125°C	SGM820B-3.0QTGS8G/TR	06VTGS XXXXX YYYYYY	Tape and Reel, 4000
		TDFN-2×2-8DL	-40°C to +125°C	SGM820B-3.0QTGT8G/TR	06X XXXX	Tape and Reel, 3000
SGM820A-2.3Q	2.325	TDFN-3×3-8GL	-40°C to +125°C	SGM820A-2.3QTGS8G/TR	0H9TGS XXXXX YYYYYY	Tape and Reel, 4000
		TDFN-2×2-8DL	-40°C to +125°C	SGM820A-2.3QTGT8G/TR	0HD XXXX	Tape and Reel, 3000
SGM820B-2.3Q	2.325	TDFN-3×3-8GL	-40°C to +125°C	SGM820B-2.3QTGS8G/TR	0HBTGS XXXXX YYYYYY	Tape and Reel, 4000
		TDFN-2×2-8DL	-40°C to +125°C	SGM820B-2.3QTGT8G/TR	0HF XXXX	Tape and Reel, 3000
SGM820A-1.6Q	1.674	TDFN-3×3-8GL	-40°C to +125°C	SGM820A-1.6QTGS8G/TR	0H8TGS XXXXX YYYYYY	Tape and Reel, 4000
		TDFN-2×2-8DL	-40°C to +125°C	SGM820A-1.6QTGT8G/TR	0HC XXXX	Tape and Reel, 3000
SGM820B-1.6Q	1.674	TDFN-3×3-8GL	-40°C to +125°C	SGM820B-1.6QTGS8G/TR	0HATGS XXXXX YYYYYY	Tape and Reel, 4000
		TDFN-2×2-8DL	-40°C to +125°C	SGM820B-1.6QTGT8G/TR	0HE XXXX	Tape and Reel, 3000


代理商 威尔逊 www.visvie.com 联系电话 138 2526 2270

NOTES:


1. The A version of SGM820xQ provides standard user-programming watchdog timeout:
   $t_{WD_standard}$ (ms) = 3.33 × C_{CWD} (nF) + 0.28 (ms)
2. The B version of SGM820xQ provides extended user-programming watchdog timeout:
   $t_{WD_extended}$ (ms) = 78.3 × C_{CWD} (nF) + 51 (ms)

MARKING INFORMATION

TDFN-3×3-8GL



TDFN-2×2-8DL



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage Range, V_{CC} ..... -0.3V to 7V
Output Voltage Range
nRESET, nWDO .....-0.3V to 7V
Voltage Ranges
SET, WDI, nMR.....-0.3V to 7V
CWD.....-0.3V to V_{CC} + 0.3V
Output Pin Current
nRESET, nWDO ..... ±20mA
Package Thermal Resistance
TDFN-3×3-8GL, θ_{JA}.....72℃/W
TDFN-3×3-8GL, θ_{JB}.....44℃/W
TDFN-3×3-8GL, $\theta_{JC(TOP)}$.....75℃/W
TDFN-3×3-8GL, $\theta_{JC(BOT)}$.....32.3℃/W
TDFN-2×2-8DL, θ_{JA}.....86℃/W
TDFN-2×2-8DL, θ_{JB}.....53℃/W
TDFN-2×2-8DL, $\theta_{JC(TOP)}$.....104℃/W
TDFN-2×2-8DL, $\theta_{JC(BOT)}$.....33.6℃/W
Junction Temperature.....+150℃
Storage Temperature Range .....-65℃ to +150℃
Lead Temperature (Soldering, 10s).....+260℃
ESD Susceptibility
HBM.....4000V
CDM 1000V

RECOMMENDED OPERATING CONDITIONS

Supply Pin Voltage, V_{CC}.....1.6V to 6.5V
SET Pin Voltage, V_{SET}.....0V to 6.5V
Watchdog Timing Capacitor, C_{CWD}..... 0.1nF to 1000nF (1)
Pull-Up Resistor to V_{CC}, R_{CWD}.....9kΩ to 11kΩ
Pull-Up Resistor, nRESET and nWDO, R_{PULL}.....
.....1kΩ to 100kΩ
nRESET Pin Current, I_{nRESET} 10mA
Watchdog Output Current, I_{nWDO} 10mA
Operating Junction Temperature Range .....-40℃ to +125℃

NOTE:
1. It is recommended to use the standard timing with a C_{CWD} capacitor from 0.1nF to 1000nF, and it offers t_{WD_TYP} from 0.613ms to 3.33s accordingly. If using extended timing, it offers t_{WD_TYP} from 58.83ms to 78.35s accordingly.

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.


DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

代理商 威尔逸 www.vsvie.com 联系电话 138 2526 5270

PIN CONFIGURATIONS

(TOP VIEW)

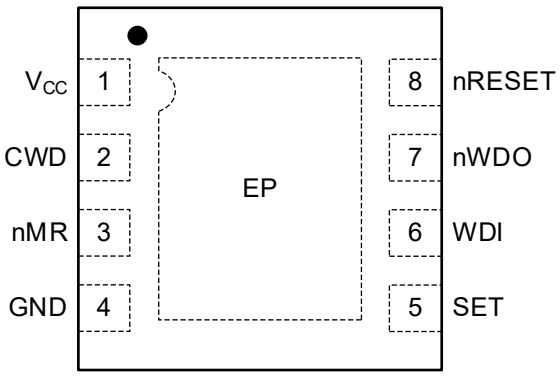

TDFN-3×3-8GL/TDFN-2×2-8DL

PIN DESCRIPTION

PIN	NAME	TYPE	FUNCTION
1	V_{CC}	I	Supply Voltage Pin.
2	CWD	I	Programmable Watchdog Timeout Input Pin. Connecting the CWD pin to GND via a capacitor to set the adjustable watchdog timeout. Connecting the CWD pin to V_{CC} via a 10kΩ resistor or leaving it unconnected to select two different kinds of the preset watchdog timeout.
3	nMR	I	Manual Reset Input Pin. It is an active-low reset input with internal pull-up current.
4	GND	G	Ground.
5	SET	I	Logic Input Pin. Connecting the SET pin to GND will disable the watchdog timer. If nRESET is deaseerted, the wactchdog can be enabled when SET is high.
6	WDI	I	Watchdog Input Pin. The WDI falling edge must appear within the timeout (t_{WD}) period. When nWDO or nRESET is low and the watchdog is disabled, WDI will be ignored. Note that this pin cannot be left floating.
7	nWDO	O	Watchdog Open-Drain Output Pin. It is recommended to connect a resistor from 1kΩ to 10kΩ to the rail. If the watchdog timeout occurs, the nWDO goes low for an nRESET timeout delay (t_{RST}).
8	nRESET	O	Active-Low Open-Drain Reset Output Pin. It is recommended to connect a resistor from 1kΩ to 10kΩ to the rail. nRESET remains low if V_{CC} is below the under-voltage threshold (V_{ITN}). And it goes high when V_{CC} exceeds V_{ITN} + V_{HYS} after nRESET delay time (t_{RST}).
Exposed Pad	EP	G	Exposed Pad. This pad is not connected to internal circuit.

NOTE: I: Input; O: Output; G: Ground.

代理商 威尔逊 www.wisvie.com 联系电话 138 2595 5270

ELECTRICAL CHARACTERISTICS

(V_{ITN} + V_{HYS} ≤ V_{CC} ≤ 6.5V, R_{PULL} = 10kΩ, T_J = -40℃ to +125℃, typical values are measured at T_J = +25℃, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
General Characteristics						
Power Supply Voltage (1) (2)	V_{CC}		1.6		6.5	V
Supply Current	I_{CC}			1.2	3.3	μA
Reset Function						
Power-On Reset Voltage (1)	V_{POR}	I_{nRESET} = 15μA, $V_{OL(MAX)}$ = 0.25V			0.8	V
Under-Voltage Threshold	V_{ITN}	SGM820A/B-3.0Q, V_{CC} falling	3.033	3.069	3.099	V
		SGM820A/B-2.3Q, V_{CC} falling	2.298	2.325	2.349	
		SGM820A/B-1.6Q, V_{CC} falling	1.654	1.674	1.691	
Hysteresis Voltage	V_{HYS}	V_{CC} rising	0.15% × V_{ITN}	0.50% × V_{ITN}	0.85% × V_{ITN}	V
nMR Pin Internal Pull-Up Current	I_{nMR}	V_{nMR} = 0V	520	620	720	nA
Watchdog Function						
CWD Pin Charging Current	I_{CWD}	CWD = 0.5V	337	375	413	nA
CWD Pin Threshold Voltage	V_{CWD}		1.180	1.210	1.245	V
nRESET, nWDO Output Low	V_{OL}	V_{CC} = 5V, I_{SINK} = 3mA			0.4	V
nRESET, nWDO Output Leakage Current, Open-Drain	I_D	V_{CC} = V_{ITN} + V_{HYS}, V_{nRESET} = V_{nWDO} = 6.5V			1	μA
Low-Level Input Voltage of nMR	V_{IL_nMR}				0.25	V
High-Level Input Voltage of nMR	V_{IH_nMR}		0.8			V
Low-Level Input Voltage of SET	V_{IL_SET}				0.25	V
High-Level Input Voltage of SET	V_{IH_SET}		0.8			V
Low-Level Input Voltage of WDI	V_{IL_WDI}				0.3 × V_{CC}	V
High-Level Input Voltage of WDI	V_{IH_WDI}		0.8 × V_{CC}			V

代理商 威尔迈 www.visvie.com 联系电话 138 2526 5270

NOTES:
1. When V_{CC} is lower than V_{POR}, nRESET and nWDO are not defined.
2. During power-on, V_{CC} must be 1.6V (MIN) for at least 400μs before nRESET correlates with V_{CC}.

TIMING REQUIREMENTS


(V_{ITN} + V_{HYS} ≤ V_{CC} ≤ 6.5V, R_{PULL} = 10kΩ, T_J = -40℃ to +125℃, typical values are measured at T_J = +25℃, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
General						
CWD Pin Evaluation Period	t_{INIT}			390		μs
Minimum nMR, SET Pin Pulse Duration				1		μs
Reset Function						
nRESET Delay Time	t_{RST}		170	200	230	ms
V_{CC} to nRESET Delay	t_{RST_DEL}	V_{CC} = (V_{ITN} + V_{HYS}) × (1 + 2.5%) to V_{ITN} × (1 - 2.5%)		90		μs
nMR to nRESET Delay	t_{MR_DEL}			700		ns
Watchdog Function						
Watchdog Timeout (1)	t_{WD}	CWD = NC, SET = 0 (2)	Watchdog disabled			
		CWD = NC, SET = 1 (2)	1360	1600	1840	ms
		CWD = 10kΩ to V_{CC}, SET = 0 (2)	Watchdog disabled			
		CWD = 10kΩ to V_{CC}, SET = 1 (2)	170	200	230	ms
Set-Up Time Required for Device to Respond to Changes on WDI after Being Enabled	t_{WD_SETUP}			140		μs
Minimum WDI Pin Pulse Duration				50		ns
WDI to nWDO Delay	t_{WD_DEL}			100		ns

NOTES:
1. The fixed watchdog timing covers both standard version and extended version.
2. SET = 0 means V_{SET} < V_{IL_SET}. SET = 1 means V_{SET} > V_{IH_SET}.

代理商 威尔逊 www.visvie.com
联系电话 138 2526 5270

TIMING DIAGRAM

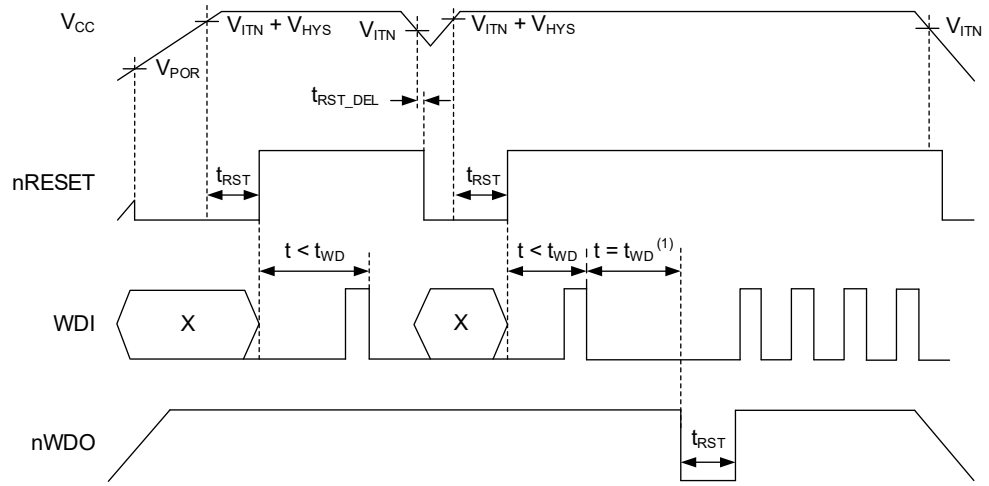

NOTE:
1. See Figure 3 for WDI timing requirements.

Figure 2. Timing Diagram

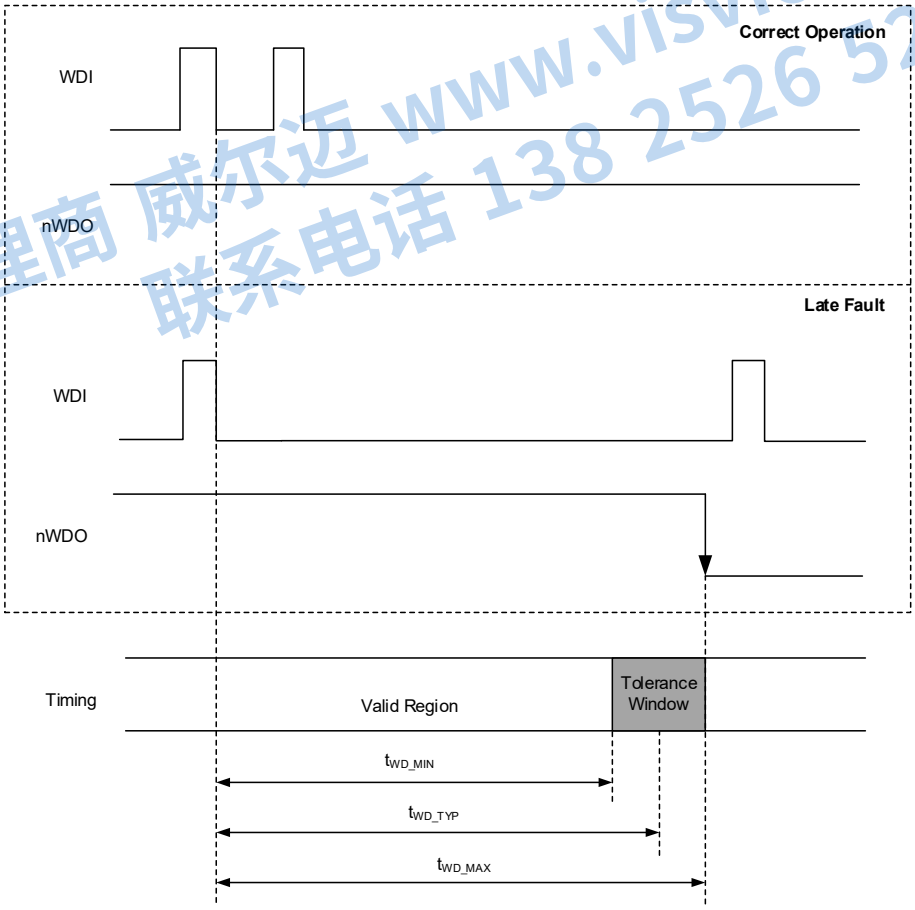



Figure 3. Watchdog Timing Diagram

代理商 威尔迈 www.visvie.com
联系电话 138 2526 5270


TYPICAL PERFORMANCE CHARACTERISTICS

At T_A = +25℃, 1.6V ≤ V_{CC} ≤ 6.5V, unless otherwise noted.


Supply Current vs. Supply Voltage

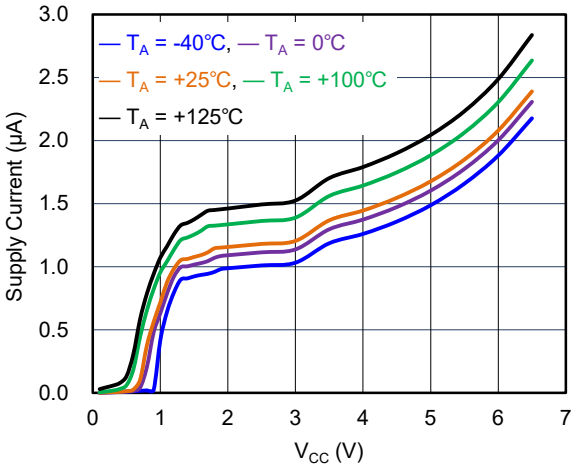


nMR Threshold vs. Temperature

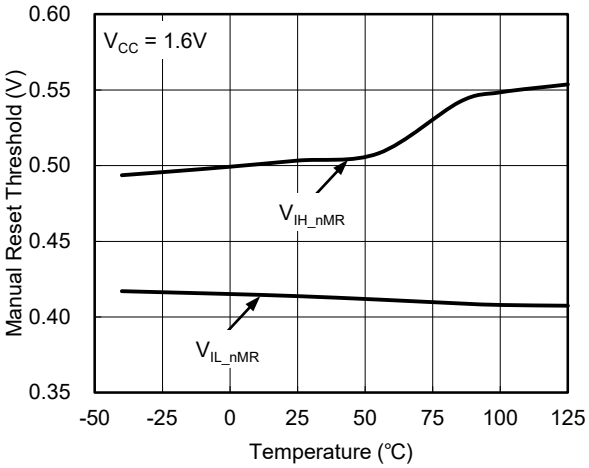


SET Threshold vs. Temperature

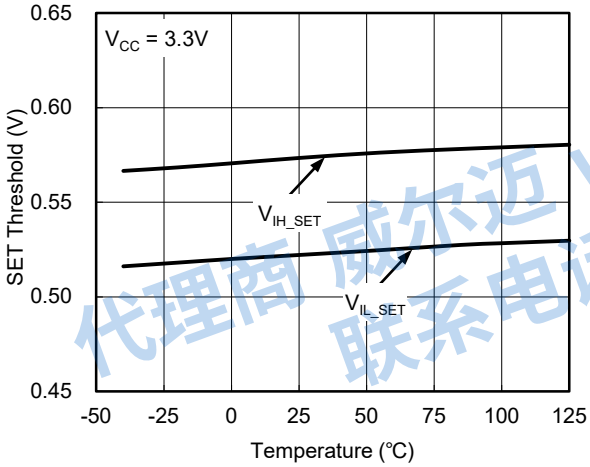


CWD Charging Current vs. Temperature

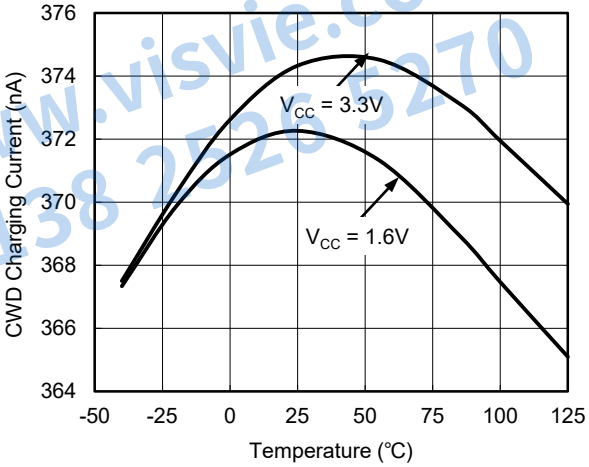

V_{ITN} + V_{HYS} Accuracy vs. Temperature

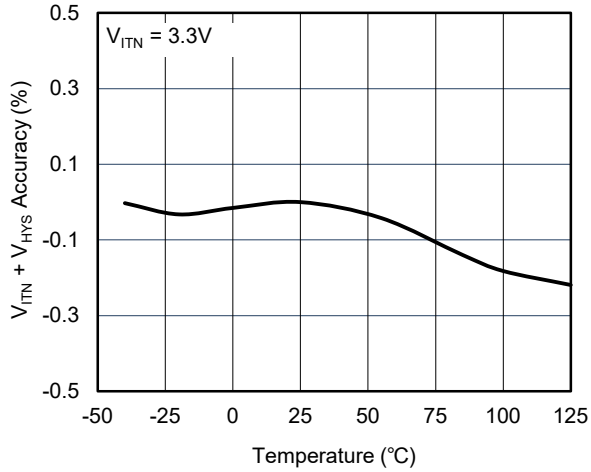

V_{ITN} Accuracy vs. Temperature

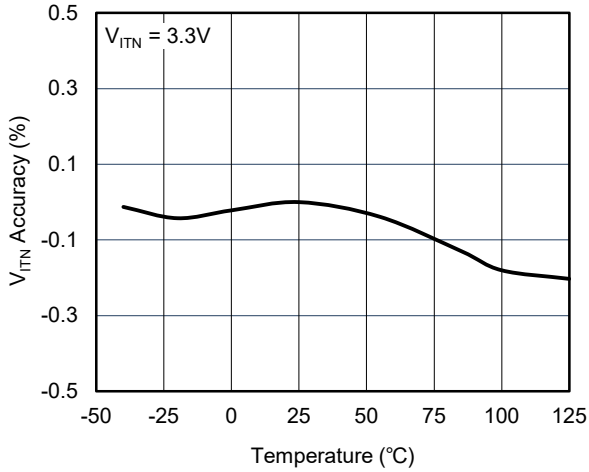


代理商 威尔迈 www.visvie.com
联系电话 138 2526 5270


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At T_A = +25℃, 1.6V ≤ V_{CC} ≤ 6.5V, unless otherwise noted.


Low-Level nRESET Voltage vs. nRESET Current

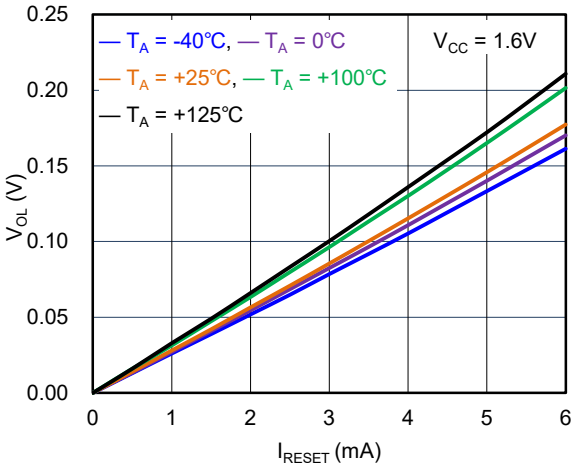


Low-Level nRESET Voltage vs. nRESET Current

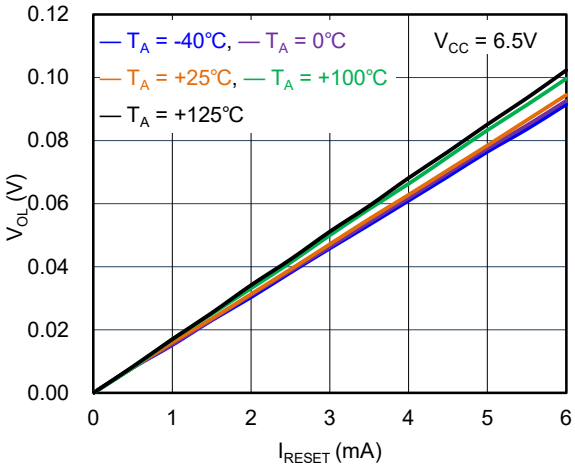


Propagation Delay vs. Overdrive

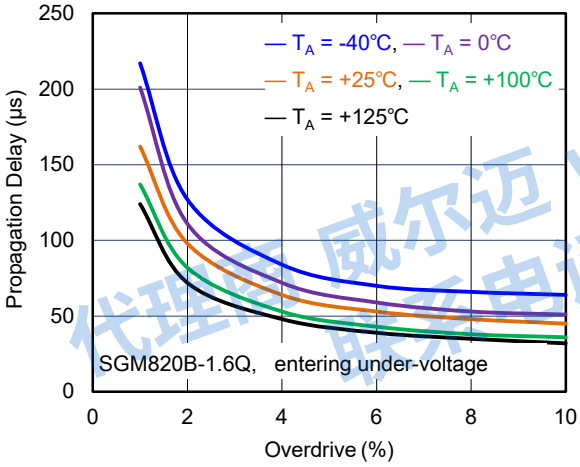


Propagation Delay vs. Overdrive

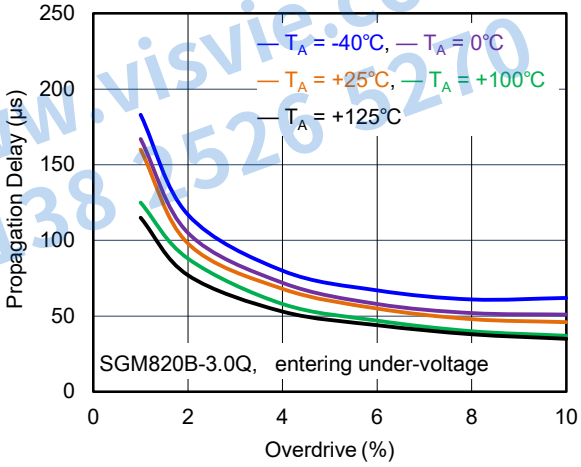

Propagation Delay (t_{RST}) vs. Overdrive

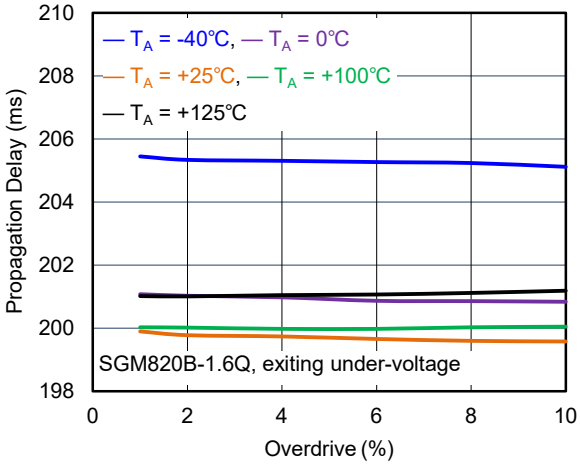

Propagation Delay (t_{RST}) vs. Overdrive

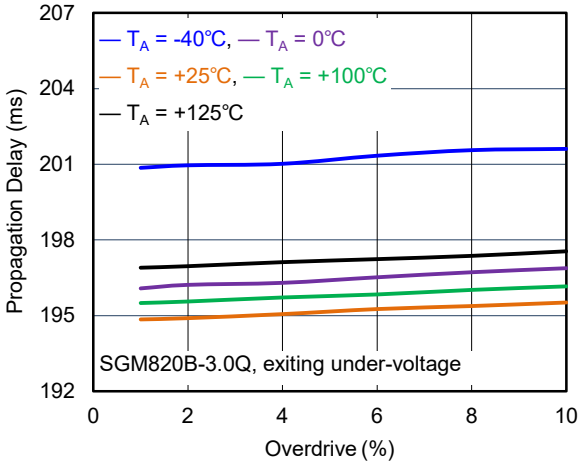


代理商 威尔迈 www.visvie.com 联系电话 138 0526 5270


TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At T_A = +25℃, 1.6V ≤ V_{CC} ≤ 6.5V, unless otherwise noted.


High-to-Low Glitch Immunity vs. Temperature

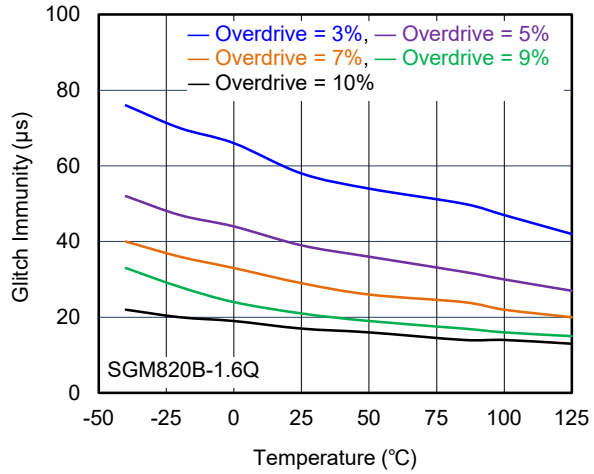


High-to-Low Glitch Immunity vs. Temperature

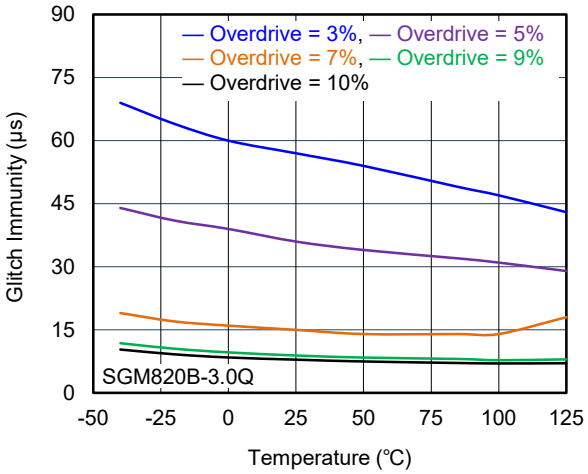


V_{ITN} + V_{HYS} Accuracy Histogram

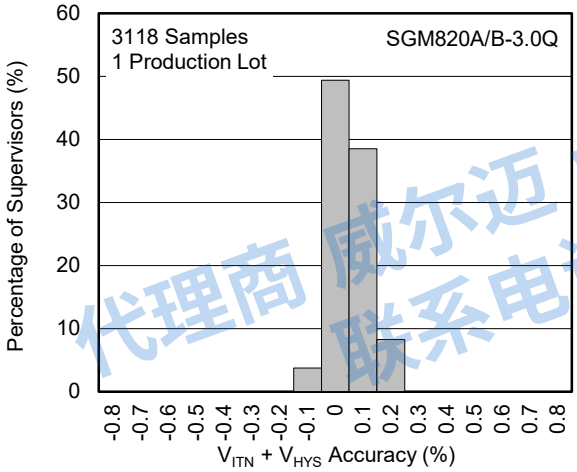

V_{ITN} Accuracy Histogram

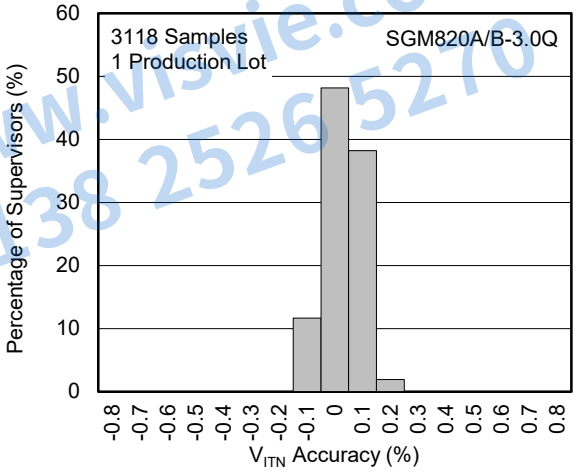

Hysteresis Histogram

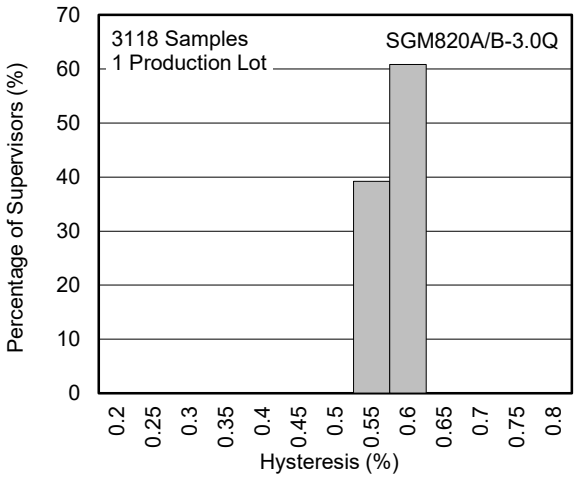

代理商 威尔迈 www.vistie.com
联系电话 138 2526 5270

FUNCTIONAL BLOCK DIAGRAM

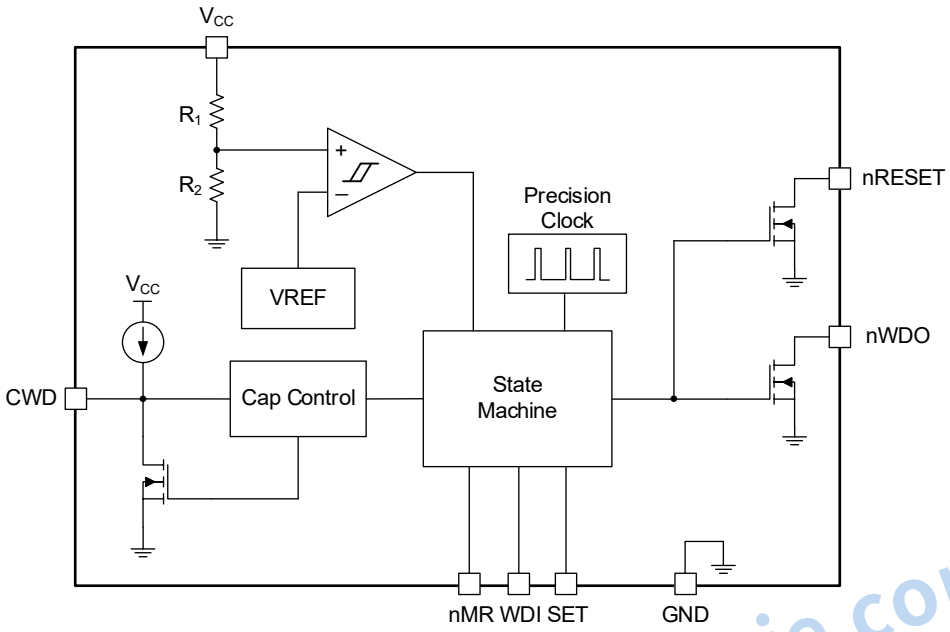


Figure 4. SGM820xQ Block Diagram

代理商 威尔迈 www.visvie.com
联系电话 138 2526 5270

DETAILED DESCRIPTION

Overview

The SGM820xQ is a high-precision voltage supervisor, integrated with an accurate watchdog timer in the specified temperature range of -40℃ to +125℃. Besides, it ensures an accurate hysteresis on the threshold, which makes it very suitable for systems that need small tolerance. And two options are provided to set the watchdog timing: a standard version and an extended one.

nRESET

The nRESET is an open-drain output pin, and users should connect the nRESET pin to V_{CC} or another voltage rail through a pull-up resistor of 1kΩ to 100kΩ. Once V_{CC} falls below the under-voltage threshold (V_{ITN}), the nRESET is asserted to be low. And if V_{CC} exceeds V_{ITN} + V_{HYS}, the nRESET will keep low for a specified reset delay time (t_{RST}). And then, the nRESET pin goes high with the pull-up resistor. Users should carefully consider the factors such as capacitive loading, logic low output voltage (V_{OL}), leakage current (I_D) and the current through the nRESET pin (I_{nRESET}) to select appropriate resistance values. It ensures that the high and low output voltage values meet the requirements of subsequent applications.

Manual Reset (nMR)

The manual reset input (nMR) is logic low effective, and it can be used to initiate a reset by a processor or some other logic circuits. The nRESET is deasserted after t_{RST} if nMR becomes high and V_{CC} is above V_{ITN} + V_{HYS}. Knowing that the nMR pin is pulled up internally, connect nMR to V_{CC} or just leave it floating once it is unnecessary to control it externally.

Under-Voltage Detection

The SGM820xQ provide three under-voltage threshold voltage options of 1.674V, 2.325V and 3.069V (TYP), which are suitable for 1.8V, 2.5V and 3.3V system rail voltage monitoring. As is shown in Figure 5, when V_{CC} is below V_{ITN}, the nRESET is asserted and remains low. And when V_{CC} is higher than V_{ITN} + V_{HYS}, the nRESET deasserts after t_{RST}.

The hysteresis of the built-in comparator can immune some noise of the system. However, for noisy applications, it is strongly recommended to place a bypass capacitor of 1nF to 100nF near the V_{CC} pin to immune the transient voltage and ensure stable operation.

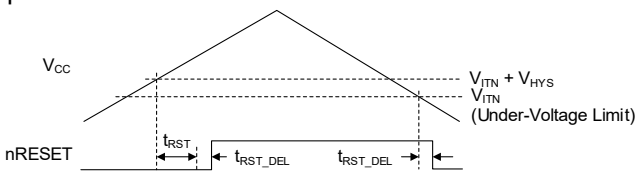


Figure 5. Under-Voltage Detection

Watchdog Mode

Details about the principles of the watchdog mode are provided in this part.

CWD

Through the CWD pin, users can obtain a high-precision and preset watchdog timing in factory or a programmed one. There are three options of the SGM820xQ to configure the watchdog timer. Keep CWD pin floating or pull up a 10kΩ resistor to V_{CC} to set two different factory-programmed timers. Connect a capacitor between the CWD pin and GND to achieve an adjustable timer. Every time when V_{CC} exceeds the V_{ITN} + V_{HYS}, the device checks the CWD configuration state within t_{INIT} (about 390μs, TYP). During this time, an internal state machine is used to check the CWD pin state and lock it out until nRESET is asserted or powered off.

Watchdog Input (WDI)

The WDI pin is the falling-edge triggered watchdog timer input pin. The WDI pulse should be sent out within t_{WD_MIN}, and the pulse of WDI should be at least larger than 50ns to ensure that the pulse can be detected by the device. If a valid WDI is received, the nWDO remains deasserted. If not, the nWDO is asserted to be low.

The WDI is a logic input pin and it cannot be left floating. Users should drive WDI to either V_{CC} or GND to avoid the increasing current of the supply current. When nRESET is asserted, the watchdog function is disabled and any signals cannot be recognized by the device. When nRESET is deasserted, the device operates normally and the WDI signals can be recognized. Figure 6 shows that a valid WDI pulse can prevent nWDO from being triggered low.

代理商 威尔迈 www.viewie.com 联系电话 138 2522 5270

DETAILED DESCRIPTION (continued)

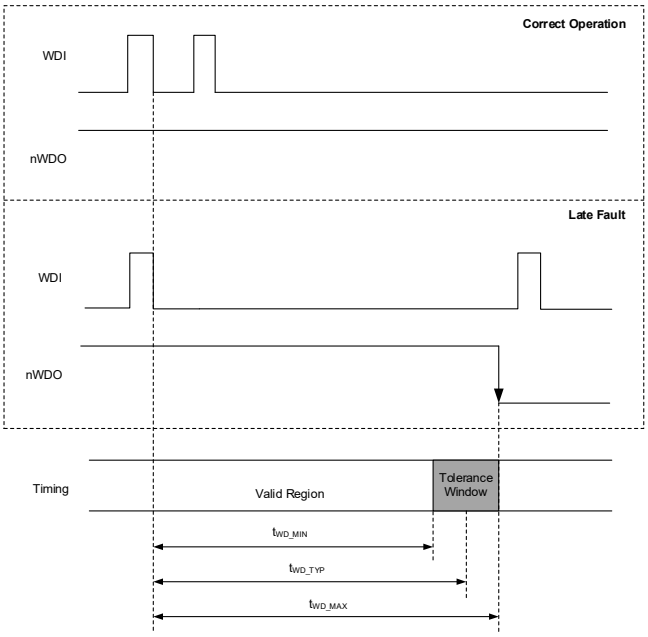


Figure 6. Watchdog Timing Diagram

Watchdog Output (nWDO)

The nWDO is the independent watchdog output pin, and it can issue a fault flag in the watchdog timing with no need to trigger an nRESET signal, which is always used to reset the whole system. When nRESET is deasserted, the nWDO keeps normal operation and it asserts to be low for t_{RST} if no valid WDI is triggered within the valid watchdog timing region. And when the nRESET signal is asserted by some other reasons, the nWDO pin goes high if a resistor is conncted to V_{CC} or another rail. When the nRESET signal is deasserted again, the watchdog timer returns back to normal operation.

SET

The watchdog timer can be enabled or disabled by the SET pin. When the SET pin is connected to GND, the watchdog timer is disabled and signals in WDI are not recognized. Once the watchdog timer is disabled, connect WDI to V_{CC} or GND to prevent any increase of I_{CC}. When the SET pin is set to logic high, and if nRESET is not asserted, the watchdog operates properly. The SET pin is permitted to continuously change the value. However, as shown in Figure 7, there is a 140μs (TYP) time for the set-up of watchdog if the watchdog runs from disabled to enabled. During this period, no response can be detected on WDI by the watchdog.

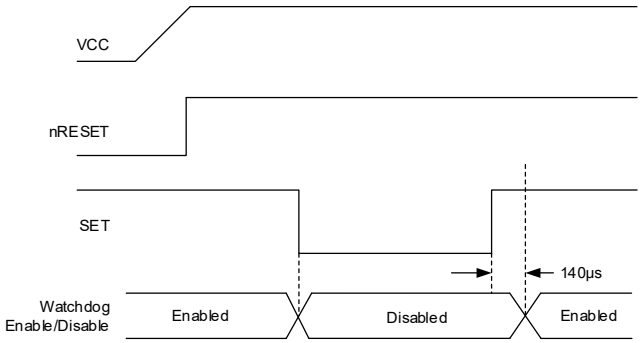


Figure 7. Enable/Disable the Watchdog

Device Functional Modes

The functional modes of the SGM820xQ are shown in Table 1.

Table 1. Device Functional Modes

V_{CC}	WDI	nWDO	nRESET
$V_{CC} < V_{POR}$	---	---	Undefined
$V_{POR} \le V_{CC} < V_{CC_MIN}$	Ignored	High	Low
$V_{CC_MIN} \le V_{CC} \le V_{ITN} + V_{HYS}$ (1)	Ignored	High	Low
$V_{CC} > V_{ITN}$ (2)	$t_{PULSE} < t_{WD_MIN}$ (3)	High	High
$V_{CC} > V_{ITN}$ (2)	$t_{PULSE} > t_{WD_MIN}$ (3)	Low	High

NOTES:
1. Only valid before V_{CC} exceeds $V_{ITN} + V_{HYS}$.
2. Only valid after V_{CC} exceeds $V_{ITN} + V_{HYS}$.
3. t_{PULSE} is the time between two falling edges on WDI.

V_{CC} is below V_{POR} ($V_{CC} < V_{POR}$)

When V_{CC} is below V_{POR}, the nRESET is not defined, which can be either logic high or logic low. At this time, the state of nRESET is greatly determined by the load floating across the nRESET pin.

Between Power-On-Reset and V_{CC_MIN} ($V_{POR} \le V_{CC} < V_{CC_MIN}$)

When $V_{POR} \le V_{CC} < V_{CC_MIN}$, the nRESET signal is asserted to logic low and the nWDO will turn into a high-impedance state regardless of the WDI signal.

Normal Operation ($V_{CC} \ge V_{CC_MIN}$)

When V_{CC} is above or equal to V_{CC_MIN}, the nRESET signal is determined by V_{CC}. When the nRESET is asserted, the nWDO turns to a high-impedance state and then the nWDO is pulled high through the pull-up resistor.


代理商 威尔逊 www.visvie.com 联系电话 138 2526 5270

APPLICATION INFORMATION


According to the eventual application requirements, the way to properly implement the device will be detailedly described in the following.

CWD Functionality


Figure 8 shows the schematic circuits of three options of the SGM820xQ to configure the watchdog timer. If connecting a 10kΩ pull-up resistor between CWD and V_{CC} or leave CWD floating (high-impedance), the factory-set watchdog timeouts are enabled, which can be seen from Table 2. Connect the capacitor between CWD and GND to set watchdog timing period using Equation 1 and 2.



a) User-ProgrammableCapacitor to GND



b) 10kΩ Resistor to VCC



c) CWD Unconnected

Figure 8. CWD Charging Circuit

Factory-Set Timing Options

As listed in Table 2, if the factory-set timing options are used, the CWD pin must be left floating or pull a 10kΩ resistor to V_{CC}.

Table 2. Factory-Set Watchdog Timing

Input		Standard and Extended Timing WDT (t_{WD})		
CWD	SET	MIN	TYP	MAX
NC	0	Watchdog disabled		
NC	1	1360ms	1600ms	1840ms
10kΩ to V_{CC}	0	Watchdog disabled		
10kΩ to V_{CC}	1	170ms	200ms	230ms

Adjustable Capacitor Timing

Capacitor timing can be adjusted by connecting the capacitor to the CWD pin, then a constant-current source of 375nA (TYP) begins to charge C_{CWD} until V_{CWD} = 1.210V (TYP). The watchdog timeout of SGM820xQ can be calculated as Equations 1 and 2, where C_{CWD} is in nF and t_{WD} is in ms.

For standard versions:

$$t_{WD_standard}\,(ms) = 3.33 \times C_{CWD}\,(nF) + 0.28\,(ms) \quad (1)$$

For extended versions:

$$t_{WD_extended}\,(ms) = 78.3 \times C_{CWD}\,(nF) + 51\,(ms) \quad (2)$$

The capacitors C_{CWD} used for design and test of the SGM820xQ should be between 100pF and 1μF. And Equations 1 and 2 are only accurate for ideal capacitors. Once the capacitor tolerances are considered, the obtained watchdog timeout may vary from the preset value. It is recommended using ceramic capacitors with C0G dielectric material to achieve higher accuracy. When a C_{CWD} capacitor is used, use Equation 1 to set t_{WD} for standard timing and use Equation 2 to set t_{WD} for extended timing.

代理商 威尔迈 www.visvie.com 联系电话 138 2526 5276

APPLICATION INFORMATION (continued)

Overdrive Voltage

Enabling the nRESET depends on the following two factors. One factor is that the V_{CC} amplitude is above the trip point (ΔV_1 and ΔV_2), and the other factor is that the time length that the voltage is above the trip point (t_1 and t_2).

When V_{CC} is lower than the trip point for a long time, then the nRESET is asserted and the output is pulled low. When V_{CC} is just a few nanosecond lower than the trip point, the nRESET does not assert and the output continues to be high. Alter the time length that asserts the nRESET by increasing the proportion where V_{CC} is lower than the trip point. For example, when V_{CC} is 10% lower than the trip point, the comparator responds much faster and the nRESET is asserted much quicker than when just below the trip point voltage. Calculation of the percentage overdrive is shown in Equation 3.

$$\text{Overdrive} = |(V_{CC}/V_{ITX} - 1) \times 100\%| \quad (3)$$

Where V_{ITX} is the trip point voltage of the threshold. If V_{CC} is higher than the positive threshold, use V_{ITN} + V_{HYS} as V_{ITX}. If V_{CC} is lower than the under-voltage threshold, then V_{ITN} is considered. In Figure 9, t_1 and t_2 represent the period of time that V_{CC} is above or below the threshold, separately. And the propagation delay versus overdrive for V_{ITN} and V_{ITN} + V_{HYS} is illustrated as well.

Due to the overdrive voltage curve, the SGM820xQ is less sensitive to short positive or negative variations on V_{CC}.

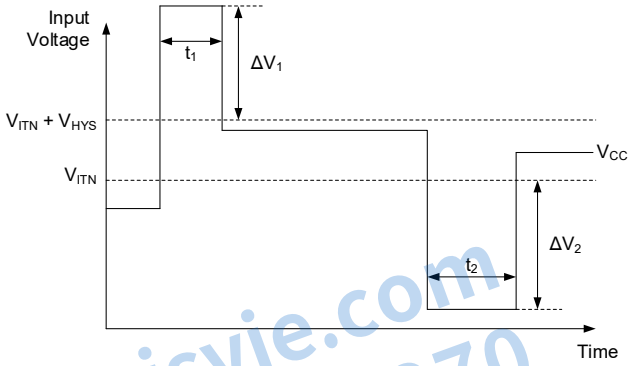


Figure 9. Overdrive Voltage

代理商 威尔迈 www.visvie.com
联系电话 138 2526 5270


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Original (AUGUST 2023) to REV.A	Page
Changed from product preview to production data	All

PACKAGE OUTLINE DIMENSIONS


TDFN-3×3-8GL

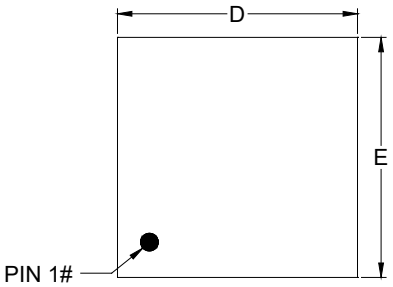


TOP VIEW

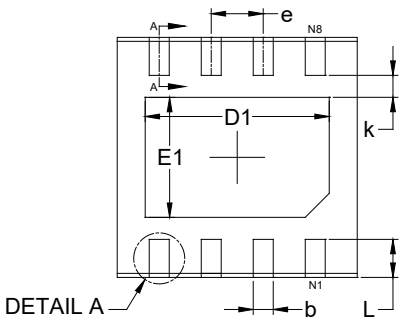

BOTTOM VIEW

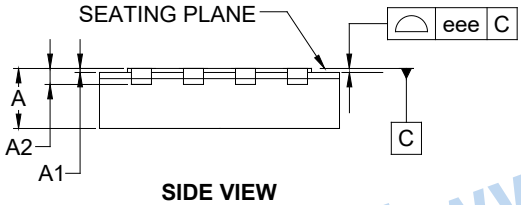


SIDE VIEW

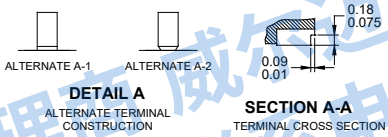

DETAIL A
ALTERNATE TERMINAL CONSTRUCTION

SECTION A-A
TERMINAL CROSS SECTION

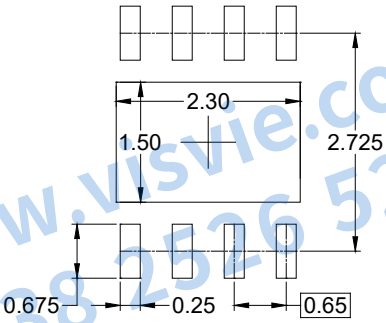

RECOMMENDED LAND PATTERN (Unit: mm)


代理商 威尔逊 www.viswie.com
联系电话 138 2526 5270

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.700	-	0.800
A1	0.000	-	0.050
A2	0.203 REF		
b	0.200	-	0.300
D	2.900	-	3.100
E	2.900	-	3.100
D1	2.200	-	2.400
E1	1.400	-	1.600
e	0.650 BSC		
L	0.375	-	0.575
k	0.275 REF		
eee	0.080		


NOTE: This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS


TDFN-2×2-8DL

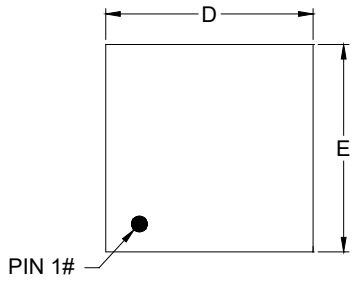


TOP VIEW

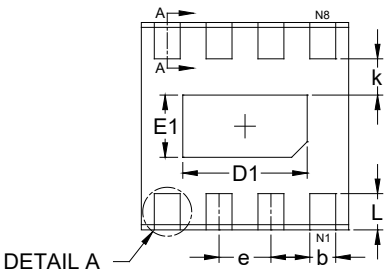

BOTTOM VIEW

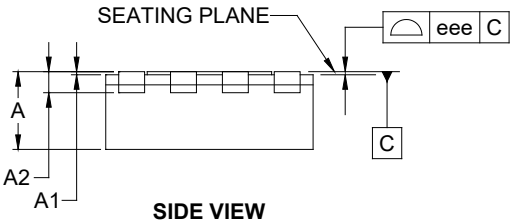


SIDE VIEW




DETAIL A

ALTERNATE TERMINAL CONSTRUCTION



SECTION A-A

TERMINAL CROSS SECTION



RECOMMENDED LAND PATTERN (Unit: mm)


代理商 威尔逊 www.visvie.com
联系电话 138 2526 5270

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.700	-	0.800
A1	0.000	-	0.050
A2	0.203 REF		
b	0.200	-	0.300
D	1.900	-	2.100
E	1.900	-	2.100
D1	1.100	-	1.300
E1	0.500	-	0.700
e	0.500 BSC		
L	0.250	-	0.450
k	0.350 REF		
eee	0.080		


NOTE: This drawing is subject to change without notice.

TAPE AND REEL INFORMATION

REEL DIMENSIONS

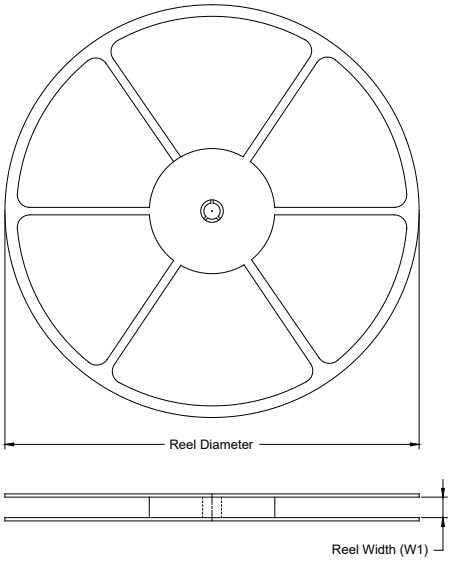

TAPE DIMENSIONS

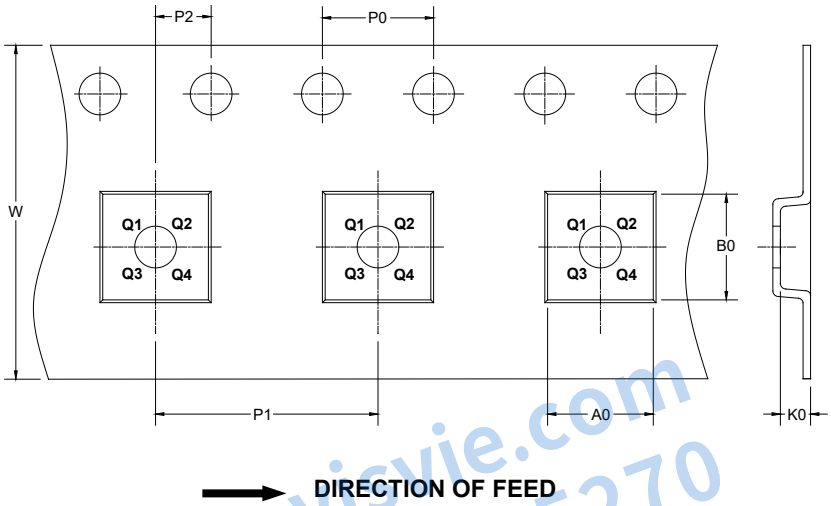

NOTE: The picture is only for reference. Please make the object as the standard.


代理商 威尔迈 www.visvie.com
联系电话 138 2526 5270

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TDFN-3×3-8GL	13″	12.4	3.35	3.35	1.13	4.0	8.0	2.0	12.0	Q2
TDFN-2×2-8DL	7″	9.5	2.30	2.30	1.10	4.0	4.0	2.0	8.0	Q2

DD0001

CARTON BOX DIMENSIONS

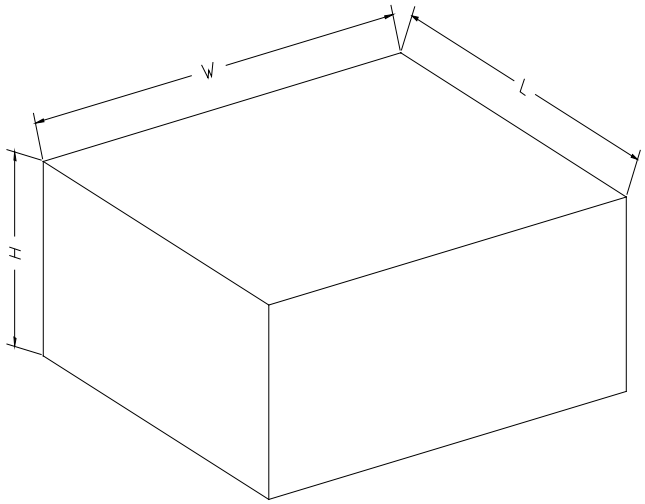

NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7″ (Option)	368	227	224	8
7″	442	410	224	18
13″	386	280	370	5

DD0002

代理商 威尔迈 www.visvie.com
联系电话 138 2526 5270