

GENERAL DESCRIPTION

The SGM2904 is a dual operational amplifier which is designed to offer a wide input common mode voltage range and output voltage swing. The device can operate from $\pm 1.65\text{V}$ to $\pm 13\text{V}$ dual power supplies or from 3.3V to 26V single supply.

The device features low noise, high slew rate, low input bias and offset current, and low offset voltage.

The SGM2904 is available in Green SOIC-8 and MSOP-8 packages. It is specified over the extended -40°C to $+125^{\circ}\text{C}$ temperature range.

FEATURES

- **Wide Input Common Mode and Differential Voltage Ranges**
- **Low Input Bias and Offset Current**
- **Output Short-Circuit Protection**
- **High Input Impedance**
- **Low Offset Voltage: 4mV (MAX)**
- **Low Noise: $40\text{nV}/\sqrt{\text{Hz}}$ at 1kHz**
- **Gain-Bandwidth Product: 2MHz**
- **Slew Rate: $0.6\text{V}/\mu\text{s}$**
- **-40°C to $+125^{\circ}\text{C}$ Operating Temperature Range**
- **Available in Green SOIC-8 and MSOP-8 Packages**

APPLICATIONS

High Impedance Sensors

Photodiode Amplifier

High End, Professional Audio

DAC Output Amplifier

Medical

PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2904	SOIC-8	-40°C to +125°C	SGM2904XS8G/TR	SGM 2904XS8 XXXXX	Tape and Reel, 4000
	MSOP-8	-40°C to +125°C	SGM2904XMS8G/TR	SGM2904 XMS8 XXXXX	Tape and Reel, 4000

NOTE: XXXXX = Date Code and Vendor Code.

Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, +V_s to -V_s.....26V
 Input/Output Voltage Range.....(-V_s) - 0.3V to (+V_s) + 0.3V
 Junction Temperature.....+150°C
 Storage Temperature Range.....-65°C to +150°C
 Lead Temperature (Soldering, 10s).....+260°C
 ESD Susceptibility
 HBM.....6000V
 MM.....400V
 CDM.....2000V


RECOMMENDED OPERATING CONDITIONS

Operating Temperature Range.....-40°C to +125°C

NOTE:

1. Proper power-supply sequencing is recommended for the CMOS device. Always sequence V_s on first, followed by the inputs and outputs.

PIN CONFIGURATIONS

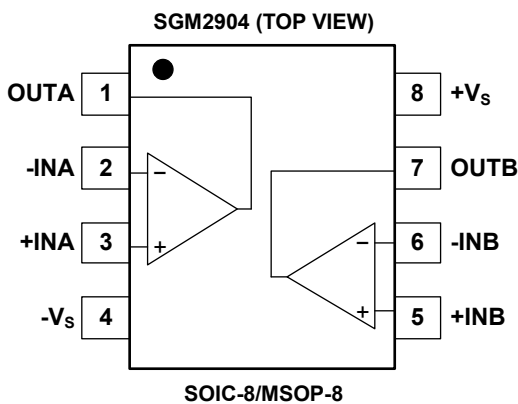

OVERSTRESS CAUTION

Stresses beyond those listed may cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational section of the specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect reliability.

ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, specification or other related things if necessary without notice at any time.







ELECTRICAL CHARACTERISTICS

(At $T_A = +25^\circ\text{C}$, $V_S = 3.3\text{V}$ to 26V and $R_L = 2\text{k}\Omega$ connected to $V_S/2$, Full = -40°C to $+125^\circ\text{C}$, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
INPUT CHARACTERISTICS							
Input Offset Voltage	V_{OS}	$V_{CM} = V_S/2$	+25°C		3	4	mV
			Full			5	
Input Offset Voltage Drift	$\Delta V_{OS}/\Delta T$		Full		2		$\mu\text{V}/^\circ\text{C}$
Input Bias Current	I_B	$V_{CM} = V_S/2$	+25°C		20		nA
Input Offset Current	I_{OS}	$V_{CM} = V_S/2$	+25°C		2		nA
Maximum Differential Input Voltage	$ V_{ID} $		Full			V_S	V
Maximum Input Difference Bias Current	$ I_{ID} $	$V_{ID} = 26\text{V}$	+25°C		2	3	μA
			Full			4	
Input Common Mode Voltage Range	V_{CM}		Full	0		$V_S - 1.5$	V
Common Mode Rejection Ratio	CMRR	$V_S = 5\text{V}$ to 26V , $0\text{V} < V_{CM} < V_S - 1.5\text{V}$	+25°C	70	80		dB
			Full	65			
Open-Loop Voltage Gain	A_{OL}	$V_S = 15\text{V}$, $V_{OUT} = 1\text{V}$ to 11V	+25°C	30	100		V/mV
			Full	20			
OUTPUT CHARACTERISTICS							
High-Level Output Voltage	V_{OH}	$V_S = 26\text{V}$, $R_L = 10\text{k}\Omega$	+25°C		60	80	mV
			Full			120	
		$V_S = 26\text{V}$, $R_L = 2\text{k}\Omega$	+25°C		300	400	
			Full			540	
Low-Level Output Voltage	V_{OL}	$V_S = 26\text{V}$, $R_L = 10\text{k}\Omega$	+25°C		20	35	mV
			Full			60	
		$V_S = 26\text{V}$, $R_L = 2\text{k}\Omega$	+25°C		110	160	
			Full			280	
Output Short-Circuit Current	I_{SC}	$V_S = 5\text{V}$ to 26V	+25°C	± 28	± 40		mA
POWER SUPPLY							
Operating Voltage Range	V_S		Full	3.3		26	V
Quiescent Current	I_Q	$I_{OUT} = 0$	+25°C		1	1.24	mA
			Full			1.5	
Power Supply Rejection Ratio	PSRR	$V_S = 5\text{V}$ to 26V	+25°C	90	100		dB
			Full	85			
DYNAMIC PERFORMANCE							
Gain-Bandwidth Product	GBP	$C_L = 50\text{pF}$	+25°C		2		MHz
Slew Rate	SR	$A_V = +1$	+25°C		0.6		V/ μs
Input Voltage Noise Density	e_n	$f = 1\text{kHz}$	+25°C		40		$\text{nV}/\sqrt{\text{Hz}}$

TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_S = 26\text{V}$ and $R_L = 2\text{k}\Omega$, unless otherwise noted.

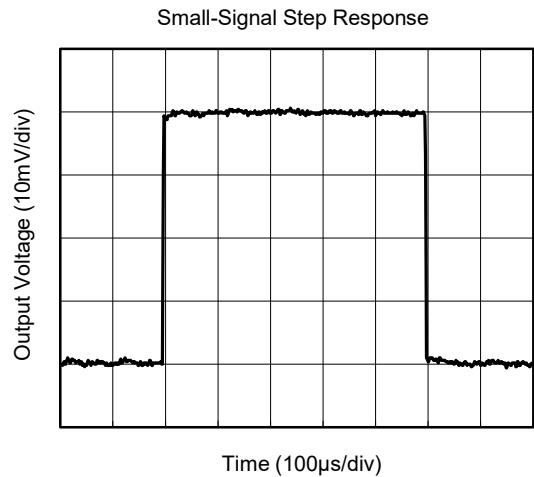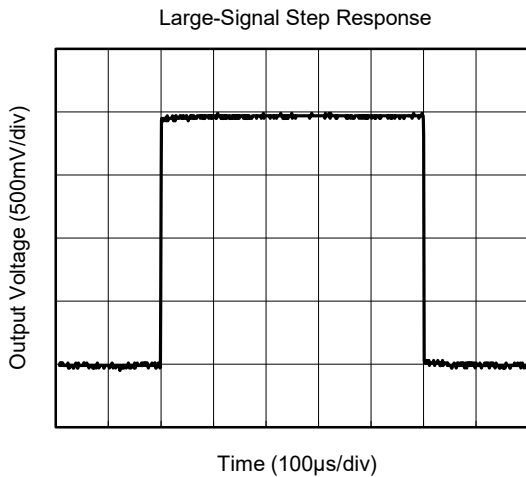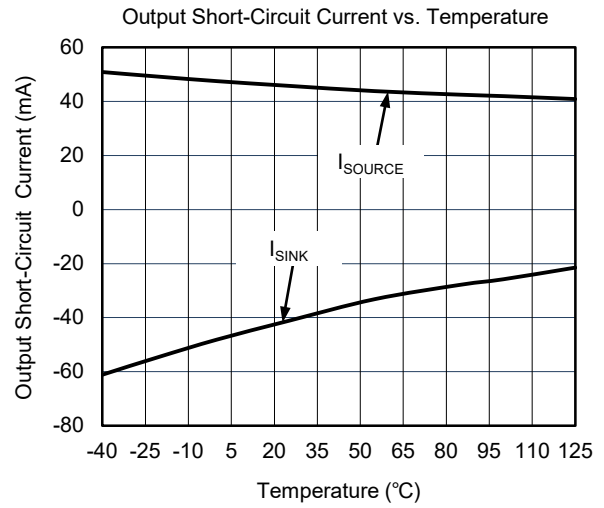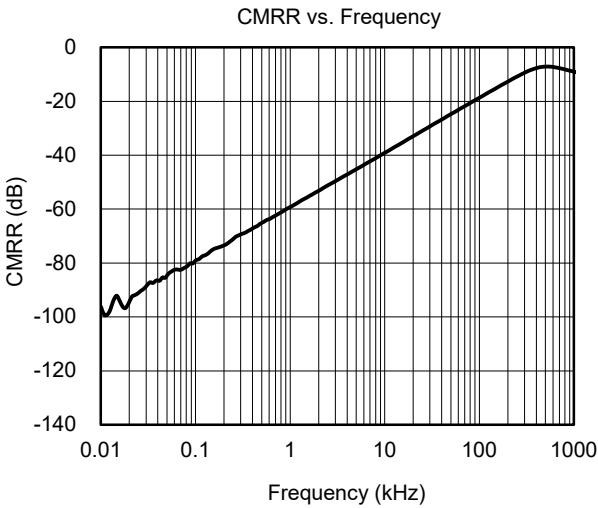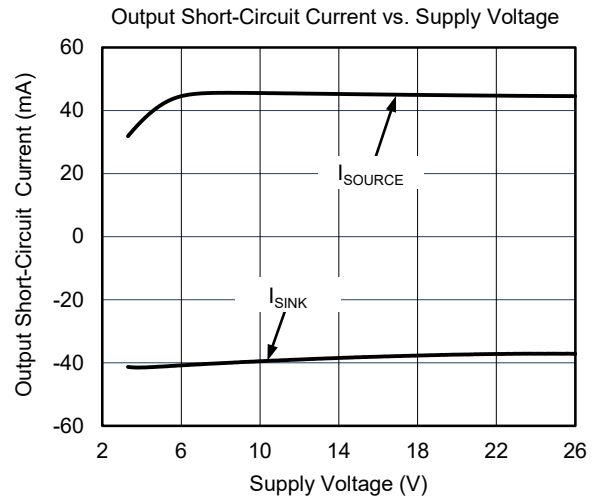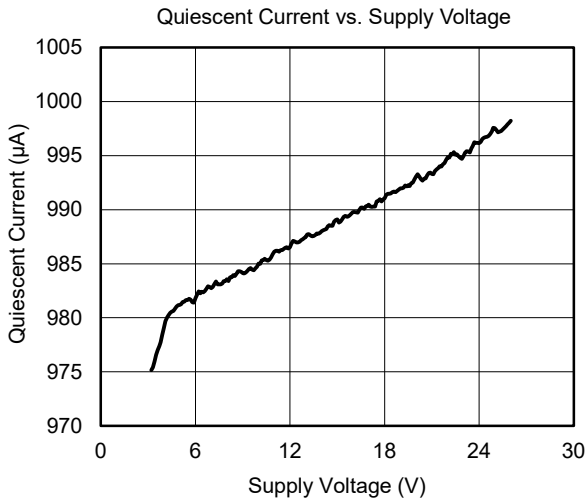

APPLICATION INFORMATION

The SGM2904 operational amplifier is useful in a wide range of signal conditioning applications.

Typical Application

A typical application for an operational amplifier is an inverting amplifier. This amplifier takes a positive voltage on the input and makes it a negative voltage of the same magnitude. In the same manner, it also makes negative voltages positive.

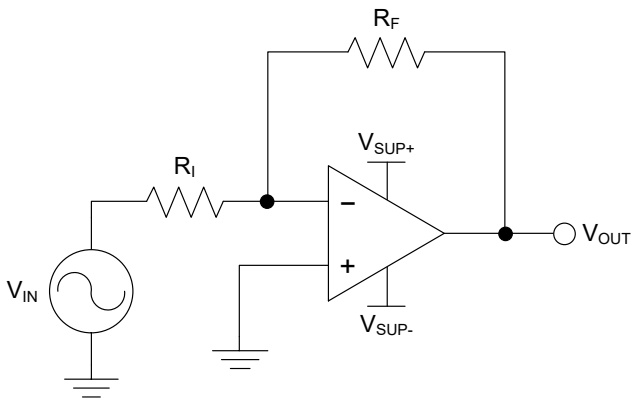


Figure 1. Application Schematic

The supply voltage must be chosen such that it is larger than the input voltage range and output range. For instance, this application will scale a signal of $\pm 0.5V$ to $\pm 1.8V$. Setting the supply at $\pm 12V$ is sufficient to accommodate this application.

Determine the gain required by the inverting amplifier using Equation 1 and Equation 2:

$$A_v = \frac{V_{OUT}}{V_{IN}} \tag{1}$$

$$A_v = \frac{1.8}{-0.5} = -3.6 \tag{2}$$

Once the desired gain is determined, choose a value for R_I or R_F . Choosing a value in the $k\Omega$ range is desirable because the amplifier circuit will use currents in the milliamp range. This ensures the part will not draw too much current. This example will choose $10k\Omega$ for R_I which means $36k\Omega$ will be used for R_F . This was determined by Equation 3.

$$A_v = -\frac{R_F}{R_I} \tag{3}$$

REVISION HISTORY



NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

Changes from Original (DECEMBER 2017) to REV.A

Changed from product preview to production data.....	All
--	-----

PACKAGE OUTLINE DIMENSIONS


SOIC-8

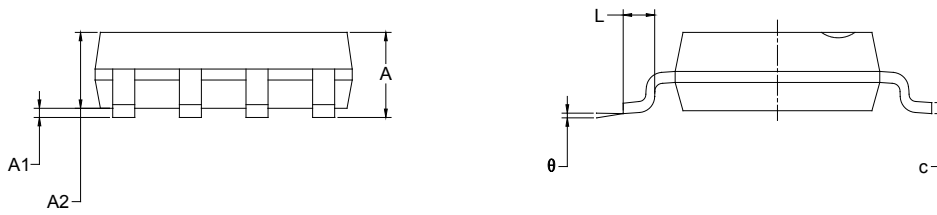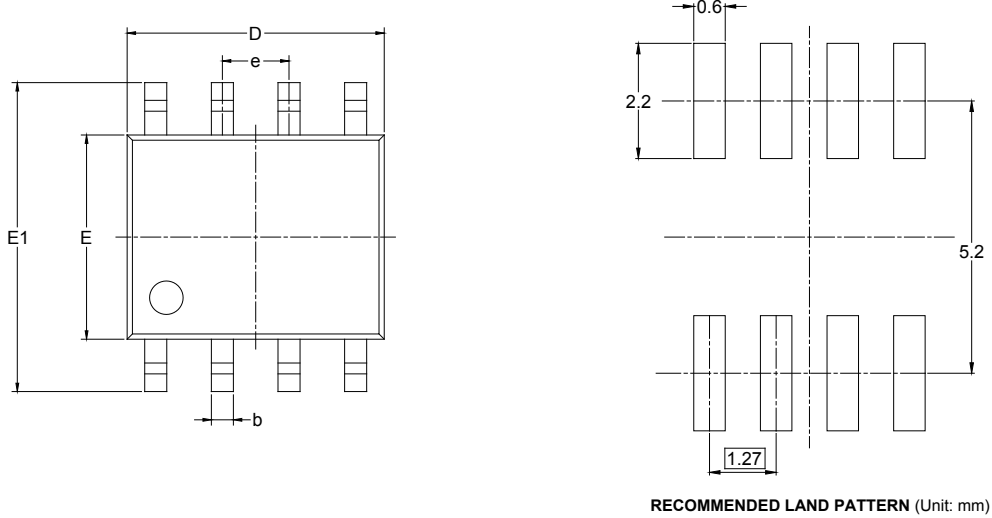


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.350	1.750	0.053	0.069
A1	0.100	0.250	0.004	0.010
A2	1.350	1.550	0.053	0.061
b	0.330	0.510	0.013	0.020
c	0.170	0.250	0.006	0.010
D	4.700	5.100	0.185	0.200
E	3.800	4.000	0.150	0.157
E1	5.800	6.200	0.228	0.244
e	1.27 BSC		0.050 BSC	
L	0.400	1.270	0.016	0.050
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

MSOP-8

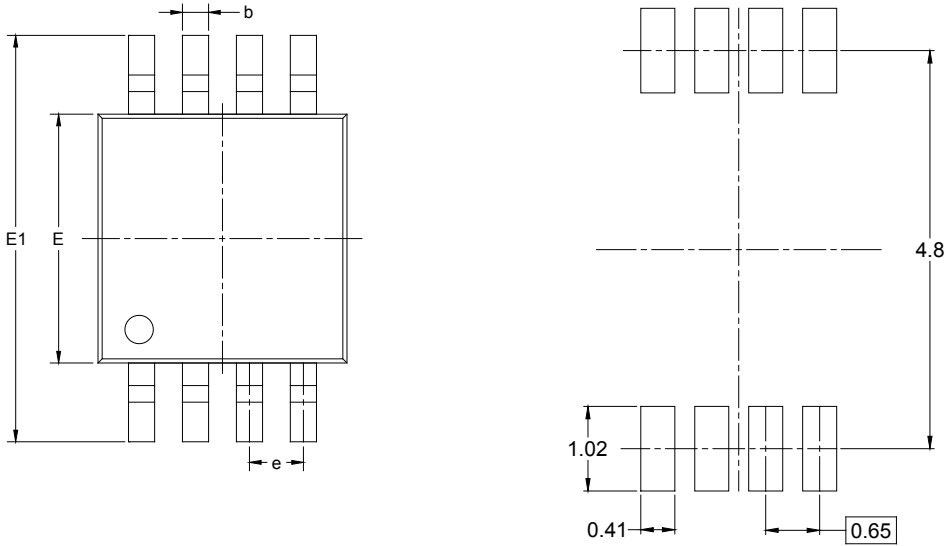

RECOMMENDED LAND PATTERN (Unit: mm)

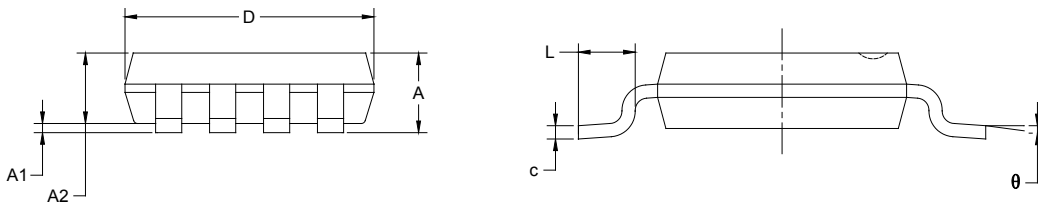

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.820	1.100	0.032	0.043
A1	0.020	0.150	0.001	0.006
A2	0.750	0.950	0.030	0.037
b	0.250	0.380	0.010	0.015
c	0.090	0.230	0.004	0.009
D	2.900	3.100	0.114	0.122
E	2.900	3.100	0.114	0.122
E1	4.750	5.050	0.187	0.199
e	0.650 BSC		0.026 BSC	
L	0.400	0.800	0.016	0.031
θ	0°	6°	0°	6°

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOIC-8	13"	12.4	6.40	5.40	2.10	4.0	8.0	2.0	12.0	Q1
MSOP-8	13"	12.4	5.20	3.30	1.50	4.0	8.0	2.0	12.0	Q1

DD0001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002