

### GENERAL DESCRIPTION

The SGM2037 is a low noise, 500mA LDO equipped with NMOS pass transistor and a separate bias supply voltage ( $V_{BIAS}$ ). The device provides very stable, accurate output voltage with low noise suitable for space constrained and noise sensitive applications. In order to optimize performance for battery operated portable applications, the SGM2037 features low  $I_Q$  consumption.

The SGM2037 is available in Green SOT-23-5, SOT-23-6 and UTDFN-1.2×1.2-6L packages. It operates over an ambient temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

### APPLICATIONS

Battery-Powered Equipment  
Smartphones and Tablets  
Cameras, DVRs, STB and Camcorders

### FEATURES

- **Input Voltage Range: 0.8V to 5.5V**
- **Bias Voltage Range: 2.5V to 5.5V**
- **Fixed Output Voltages:**  
0.8V to 3.6V with 0.05V per Step
- **Adjustable Output Voltage Range: 0.8V to 3.6V**
- **Output Voltage Accuracy:  $\pm 0.8\%$**
- **500mA Nominal Output Current**
- **Low Dropout: 120mV (TYP) at 500mA**
- **Very Low Bias Input Current: 37 $\mu\text{A}$  (TYP)**
- **Very Low Bias Input Current in Shutdown: 0.01 $\mu\text{A}$  (TYP)**
- **Low Noise: 25 $\mu\text{V}_{\text{RMS}}$  (TYP)**
- **Over-Current and Over-Temperature Protections**
- **Fast Load Transient Response**
- **Logic Level Enable Input for ON/OFF Control**
- **$-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Operating Temperature Range**
- **Available in Green SOT-23-5, SOT-23-6 and UTDFN-1.2×1.2-6L Packages**

### TYPICAL APPLICATION

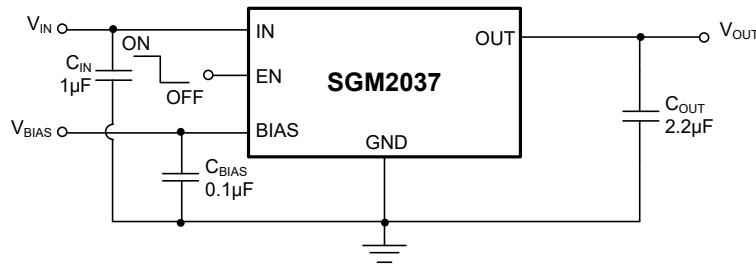


Figure 1. Fixed Voltage Typical Application Circuit

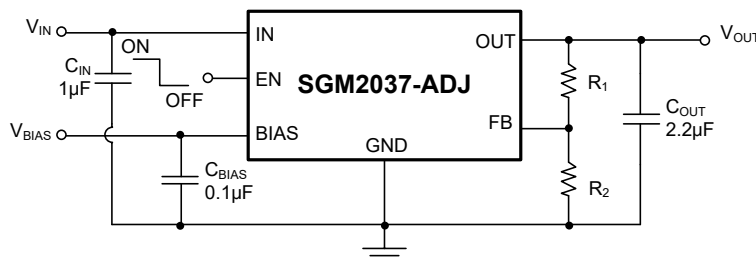


Figure 2. Adjustable Voltage Typical Application Circuit

## PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2037-0.8	SOT-23-5	-40°C to +125°C	SGM2037-0.8XN5G/TR	GP6XX	Tape and Reel, 3000
SGM2037-0.9	SOT-23-5	-40°C to +125°C	SGM2037-0.9XN5G/TR	GV1XX	Tape and Reel, 3000
SGM2037-1.0	SOT-23-5	-40°C to +125°C	SGM2037-1.0XN5G/TR	GV2XX	Tape and Reel, 3000
SGM2037-1.05	SOT-23-5	-40°C to +125°C	SGM2037-1.05XN5G/TR	GV3XX	Tape and Reel, 3000
SGM2037-1.1	SOT-23-5	-40°C to +125°C	SGM2037-1.1XN5G/TR	GV4XX	Tape and Reel, 3000
SGM2037-1.15	SOT-23-5	-40°C to +125°C	SGM2037-1.15XN5G/TR	GV5XX	Tape and Reel, 3000
SGM2037-1.2	SOT-23-5	-40°C to +125°C	SGM2037-1.2XN5G/TR	GV6XX	Tape and Reel, 3000
SGM2037-1.25	SOT-23-5	-40°C to +125°C	SGM2037-1.25XN5G/TR	GV7XX	Tape and Reel, 3000
SGM2037-1.3	SOT-23-5	-40°C to +125°C	SGM2037-1.3XN5G/TR	GV8XX	Tape and Reel, 3000
SGM2037-1.5	SOT-23-5	-40°C to +125°C	SGM2037-1.5XN5G/TR	GV9XX	Tape and Reel, 3000
SGM2037-1.8	SOT-23-5	-40°C to +125°C	SGM2037-1.8XN5G/TR	GVAXX	Tape and Reel, 3000
SGM2037-2.5	SOT-23-5	-40°C to +125°C	SGM2037-2.5XN5G/TR	GVBXX	Tape and Reel, 3000
SGM2037-2.8	SOT-23-5	-40°C to +125°C	SGM2037-2.8XN5G/TR	GVCXX	Tape and Reel, 3000
SGM2037-3.0	SOT-23-5	-40°C to +125°C	SGM2037-3.0XN5G/TR	GVDXX	Tape and Reel, 3000
SGM2037-3.3	SOT-23-5	-40°C to +125°C	SGM2037-3.3XN5G/TR	GVEXX	Tape and Reel, 3000
SGM2037-3.6	SOT-23-5	-40°C to +125°C	SGM2037-3.6XN5G/TR	M35XX	Tape and Reel, 3000
SGM2037-ADJ	SOT-23-6	-40°C to +125°C	SGM2037-ADJXN6G/TR	GVFXX	Tape and Reel, 3000
SGM2037-0.8	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-0.8XUDX6G/TR	36 XX	Tape and Reel, 5000
SGM2037-0.9	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-0.9XUDX6G/TR	Z9 XX	Tape and Reel, 5000
SGM2037-1.0	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.0XUDX6G/TR	ZA XX	Tape and Reel, 5000
SGM2037-1.05	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.05XUDX6G/TR	ZB XX	Tape and Reel, 5000
SGM2037-1.1	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.1XUDX6G/TR	ZC XX	Tape and Reel, 5000
SGM2037-1.15	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.15XUDX6G/TR	ZD XX	Tape and Reel, 5000
SGM2037-1.2	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.2XUDX6G/TR	ZE XX	Tape and Reel, 5000
SGM2037-1.25	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.25XUDX6G/TR	ZF XX	Tape and Reel, 5000
SGM2037-1.3	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.3XUDX6G/TR	00 XX	Tape and Reel, 5000

# 500mA, Low Noise, Very Low Dropout Bias Rail CMOS Voltage Regulator


## SGM2037

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM2037-1.5	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.5XUDX6G/TR	01 XX	Tape and Reel, 5000
SGM2037-1.8	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-1.8XUDX6G/TR	02 XX	Tape and Reel, 5000
SGM2037-2.5	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-2.5XUDX6G/TR	03 XX	Tape and Reel, 5000
SGM2037-2.8	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-2.8XUDX6G/TR	04 XX	Tape and Reel, 5000
SGM2037-3.0	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-3.0XUDX6G/TR	05 XX	Tape and Reel, 5000
SGM2037-3.3	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-3.3XUDX6G/TR	06 XX	Tape and Reel, 5000
SGM2037-3.6	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-3.6XUDX6G/TR	37 XX	Tape and Reel, 5000
SGM2037-ADJ	UTDFN-1.2×1.2-6L	-40°C to +125°C	SGM2037-ADJXUDX6G/TR	07 XX	Tape and Reel, 5000


### MARKING INFORMATION

NOTE: XX = Date Code.

#### SOT-23-6/SOT-23-5



#### UTDFN-1.2×1.2-6L



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

### ABSOLUTE MAXIMUM RATINGS

IN, BIAS, EN to GND .....	-0.3V to 6V
OUT, FB to GND .....	-0.3V to (V <sub>IN</sub> + 0.3V)
Power Dissipation, P <sub>D</sub> @ T <sub>A</sub> = +25°C	
SOT-23-5 .....	584mW
SOT-23-6 .....	641mW
UTDFN-1.2×1.2-6L .....	612mW
Package Thermal Resistance	
SOT-23-5, θ <sub>JA</sub> .....	214°C/W
SOT-23-6, θ <sub>JA</sub> .....	195°C/W
UTDFN-1.2×1.2-6L, θ <sub>JA</sub> .....	204°C/W
Junction Temperature .....	+150°C
Storage Temperature Range .....	-65°C to +150°C
Lead Temperature (Soldering, 10s) .....	+260°C
ESD Susceptibility	
HBM .....	8000V
MM .....	400V
CDM .....	1000V

### RECOMMENDED OPERATING CONDITIONS

Operating Input Voltage Range .....	0.8V to 5.5V
Operating Bias Voltage Range .....	2.5V to 5.5V
Operating Temperature Range .....	-40°C to +125°C

### OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


### ESD SENSITIVITY CAUTION

This integrated circuit can be damaged by ESD if you don't pay attention to ESD protection. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because very small parametric changes could cause the device not to meet its published specifications.

### DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATIONS

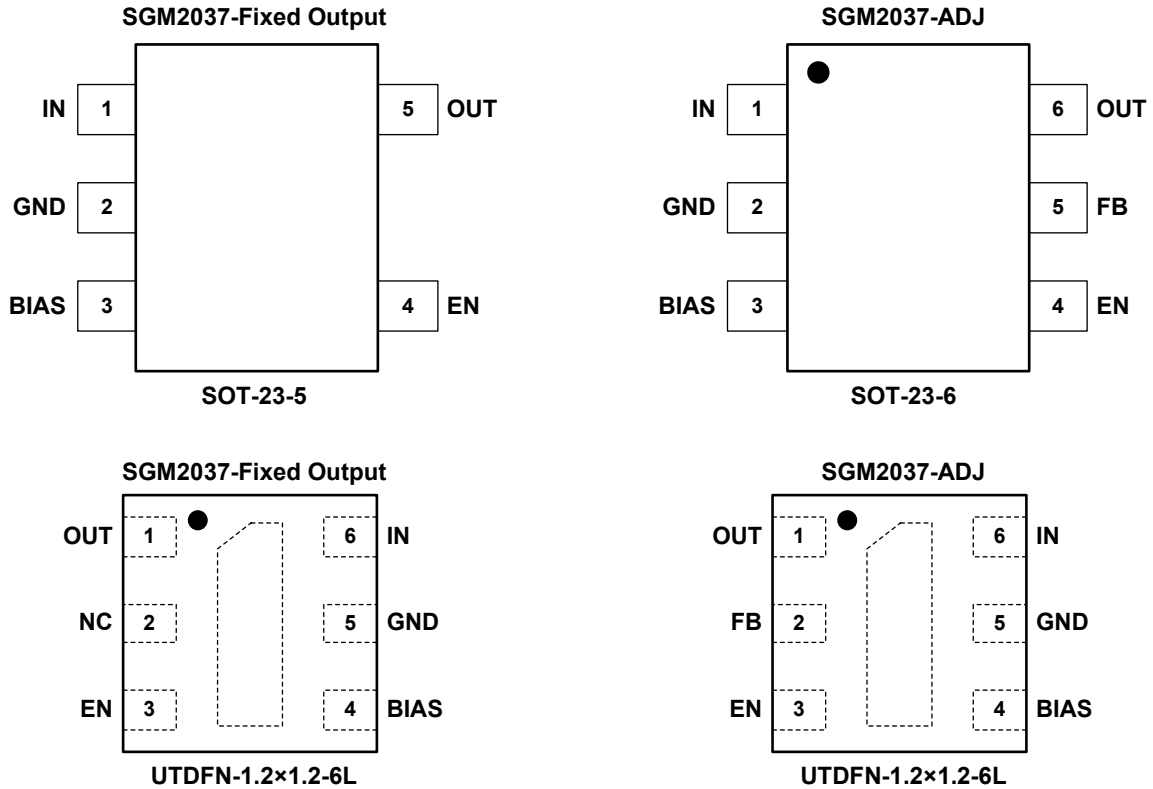

PIN DESCRIPTION

PIN			NAME	FUNCTION
SOT-23-5	SOT-23-6	UTDFN-1.2x1.2-6L		
1	1	6	IN	Input Voltage Supply Pin.
2	2	5	GND	Ground.
3	3	4	BIAS	Bias Voltage Supply for Internal Control Circuits. This pin is monitored by internal under-voltage lockout circuit.
4	4	3	EN	Enable Pin. Driving this pin high enables the regulator. Driving this pin low puts the regulator into shutdown mode.
5	6	1	OUT	Regulated Output Voltage Pin. It is recommended to use output capacitor with effective capacitance in the range of 1μF to 10μF.
-	5	2	FB	Feedback Pin (adjustable voltage version only). Connect to output voltage resistor divider central node.
-	-		NC	Not Connected (fixed voltage version).
-	-	Exposed Pad	-	Exposed Pad. The exposed pad should be connected to a large ground plane to maximize thermal performance.

## ELECTRICAL CHARACTERISTICS

( $V_{BIAS} = 2.7V$  or ( $V_{OUT(NOM)} + 1.6V$ ), whichever is greater,  $V_{EN} = V_{BIAS}$ ,  $V_{IN} = V_{OUT(NOM)} + 0.3V$ ,  $I_{OUT} = 1mA$ ,  $C_{IN} = 1\mu F$ ,  $C_{BIAS} = 0.1\mu F$ ,  $C_{OUT} = 2.2\mu F$ , Full =  $-40^{\circ}C$  to  $+125^{\circ}C$ , unless otherwise noted.)







PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS
Operating Input Voltage Range	$V_{IN}$		$+25^{\circ}C$	$V_{OUT(NOM)} + V_{DROP\_IN}$		5.5	V
Operating Bias Voltage Range	$V_{BIAS}$		$+25^{\circ}C$	$(V_{OUT(NOM)} + 1.4) \geq 2.5$		5.5	V
Under-Voltage Lockout Thresholds	$V_{UVLO}$	$V_{BIAS}$ rising	$+25^{\circ}C$		1.6		V
		Hysteresis	$+25^{\circ}C$		0.2		
Feedback Voltage	$V_{FB}$	SGM2037-ADJ, $V_{OUT} = V_{FB}$ , $I_{OUT} = 1mA$ to $500mA$	$+25^{\circ}C$	0.7936	0.8	0.8064	V
Output Voltage Accuracy	$V_{OUT}$	$V_{IN} = (V_{OUT(NOM)} + 0.3V)$ to $(V_{OUT(NOM)} + 1.0V)$ , $V_{BIAS} = 2.7V$ or $(V_{OUT(NOM)} + 1.6V)$ to $5.5V$ , $I_{OUT} = 1mA$ to $500mA$	$+25^{\circ}C$	-0.8		0.8	%
			Full	-1.5		1.5	
$V_{IN}$ Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \times V_{OUT}}$	$V_{IN} = (V_{OUT(NOM)} + 0.3V)$ to $5.5V$	$+25^{\circ}C$		0.002	0.03	%/V
$V_{BIAS}$ Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{BIAS} \times V_{OUT}}$	$V_{BIAS} = 2.7V$ or $(V_{OUT(NOM)} + 1.6V)$ to $5.5V$ , $0.8V \leq V_{OUT(NOM)} \leq 1.8V$ $V_{BIAS} = (V_{OUT(NOM)} + 1.6V)$ to $5.5V$ , $1.8V < V_{OUT(NOM)} \leq 3.6V$	$+25^{\circ}C$		0.002	0.03	%/V
			$+25^{\circ}C$		0.005	0.1	
Load Regulation	$\Delta V_{OUT}$	$I_{OUT} = 1mA$ to $500mA$ , $0.8V \leq V_{OUT(NOM)} \leq 1.8V$	$+25^{\circ}C$		0.5	2	mV
		$I_{OUT} = 1mA$ to $500mA$ , $1.8V < V_{OUT(NOM)} \leq 3.6V$	$+25^{\circ}C$		1	5	
$V_{IN}$ Dropout Voltage <sup>(1)</sup>	$V_{DROP\_IN}$	$I_{OUT} = 150mA$	$+25^{\circ}C$		35	50	mV
		$I_{OUT} = 500mA$	$+25^{\circ}C$		120	170	
$V_{BIAS}$ Dropout Voltage <sup>(1, 2)</sup>	$V_{DROP\_BIAS}$	$I_{OUT} = 500mA$	$+25^{\circ}C$		1.2	1.5	V
Output Current Limit	$I_{LIM}$		$+25^{\circ}C$	505	670		mA
Short Current Limit	$I_{SHORT}$	$V_{OUT} = 0V$	$+25^{\circ}C$		340		mA
FB Pin Input Current	$I_{FB}$		$+25^{\circ}C$	-20		20	nA
			Full	-30		30	
BIAS Pin Operating Current	$I_{BIAS}$	$V_{BIAS} = 5.5V$	$+25^{\circ}C$		37	53	$\mu A$
			Full			55	
IN Pin Disable Current	$I_{DIS\_IN}$	$V_{EN} = 0V$	$+25^{\circ}C$		0.1	0.5	$\mu A$
			Full			1.6	
BIAS Pin Disable Current	$I_{DIS\_BIAS}$	$V_{EN} = 0V$	$+25^{\circ}C$		0.01	0.5	$\mu A$
			Full			2.5	
EN Pin Threshold Voltage	$V_{IH}$	EN input voltage high	Full	1.2			V
	$V_{IL}$	EN input voltage low	Full			0.25	V
EN Pin Pull-Down Resistance	$R_{EN}$		$+25^{\circ}C$		580		k $\Omega$
Turn-On Time	$t_{ON}$	From assertion of $V_{EN}$ to $V_{OUT} = 90\%V_{OUT(NOM)}$	$+25^{\circ}C$		100		$\mu s$
$V_{IN}$ Power Supply Rejection Ratio	PSRR	$V_{IN}$ to $V_{OUT}$ , $f = 1kHz$ , $V_{OUT(NOM)} = 1.0V$ , $I_{OUT} = 150mA$ , $V_{IN} \geq 1.5V$	$+25^{\circ}C$		71		dB
$V_{BIAS}$ Power Supply Rejection Ratio		$V_{BIAS}$ to $V_{OUT}$ , $f = 1kHz$ , $V_{OUT(NOM)} = 1.0V$ , $I_{OUT} = 150mA$ , $V_{IN} \geq 1.5V$	$+25^{\circ}C$		76		
Output Voltage Noise	$e_n$	$V_{IN} = V_{OUT(NOM)} + 0.5V$ , $V_{OUT(NOM)} = 1.0V$ , $f = 10Hz$ to $100kHz$	$+25^{\circ}C$		25		$\mu V_{RMS}$
Output Discharge Resistance	$R_{DISCH}$	$V_{EN} = 0V$ , $V_{OUT} = 0.5V$	$+25^{\circ}C$		120		$\Omega$
Thermal Shutdown Temperature	$T_{SHDN}$				160		$^{\circ}C$
Thermal Shutdown Hysteresis	$\Delta T_{SHDN}$				20		$^{\circ}C$

## NOTES:

- Dropout voltage is characterized when  $V_{OUT}$  falls 5% below  $V_{OUT(NOM)}$ .
- For output voltages below 1.5V,  $V_{BIAS}$  dropout voltage does not apply due to a minimum bias operating voltage of 2.5V.







TYPICAL PERFORMANCE CHARACTERISTICS

$T_A = +25^\circ\text{C}$ ,  $V_{IN} = 1.3\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.7\text{V}$ ,  $V_{OUT(NOM)} = 1.0\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

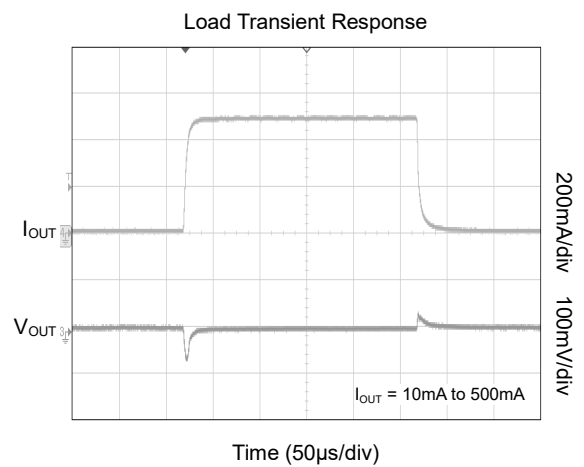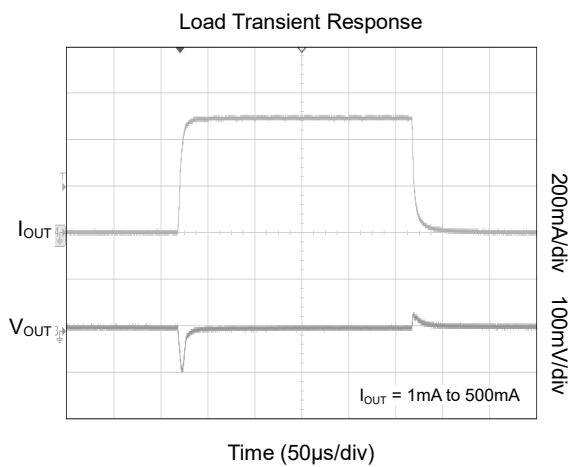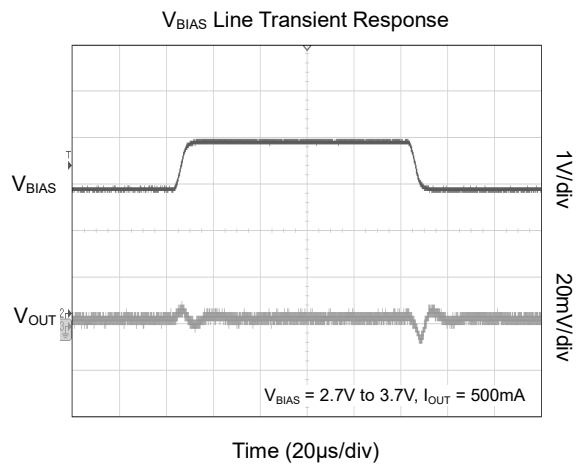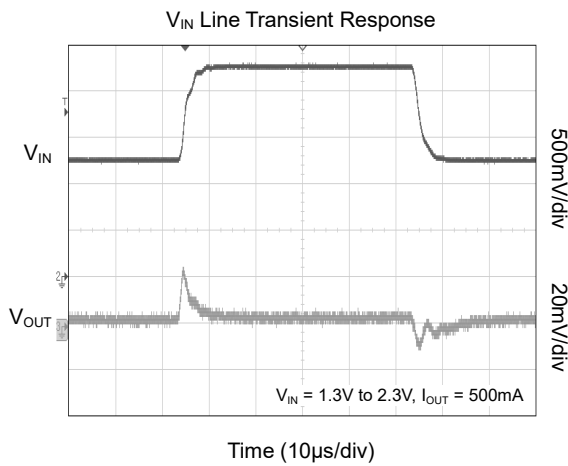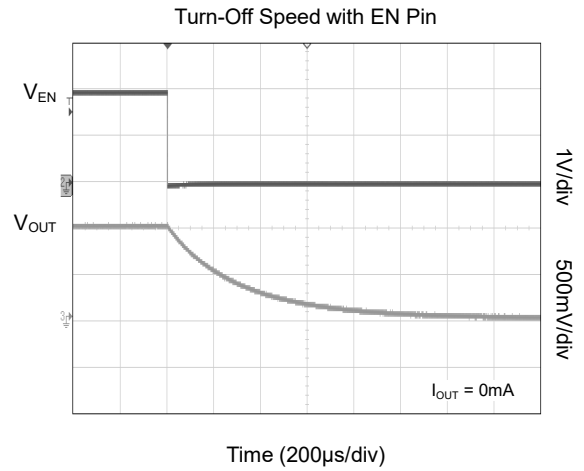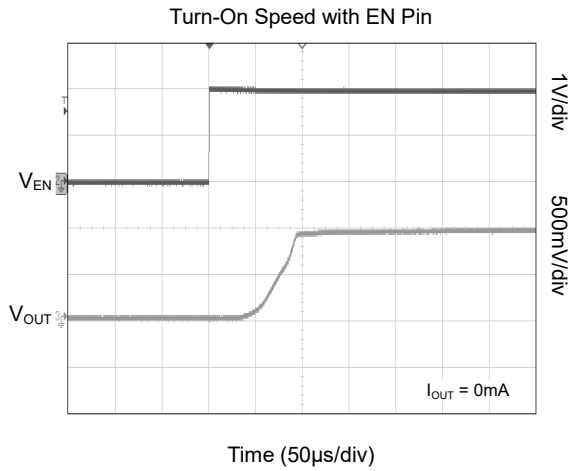







TYPICAL PERFORMANCE CHARACTERISTICS (continued)

$T_A = +25^\circ\text{C}$ ,  $V_{IN} = 1.3\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.7\text{V}$ ,  $V_{OUT(NOM)} = 1.0\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

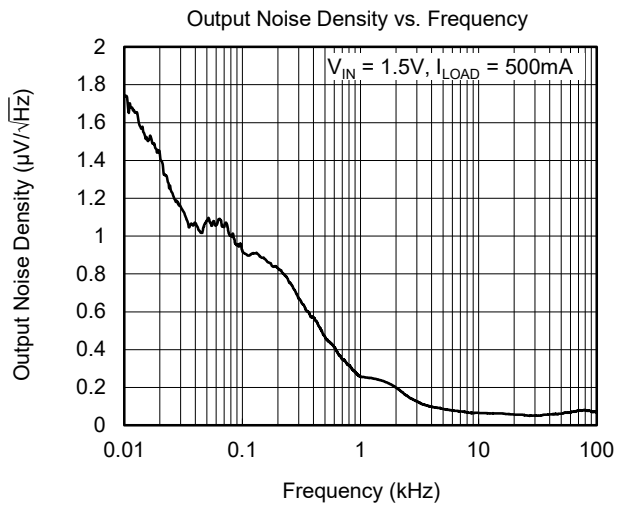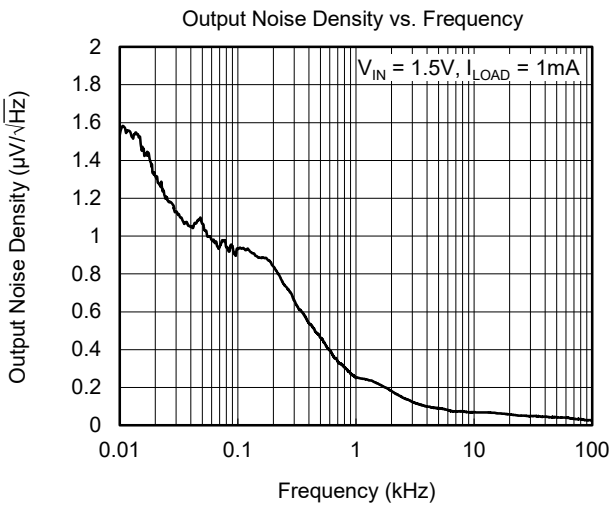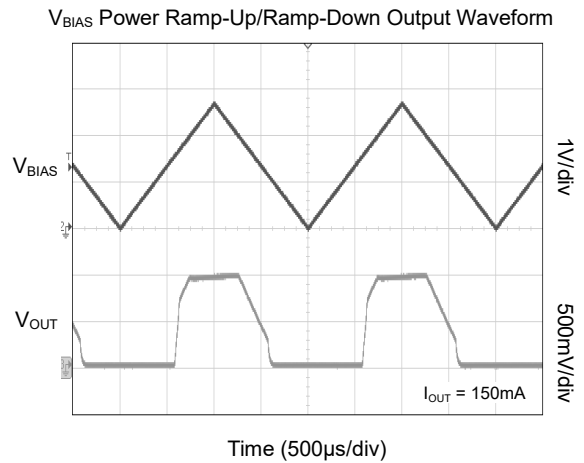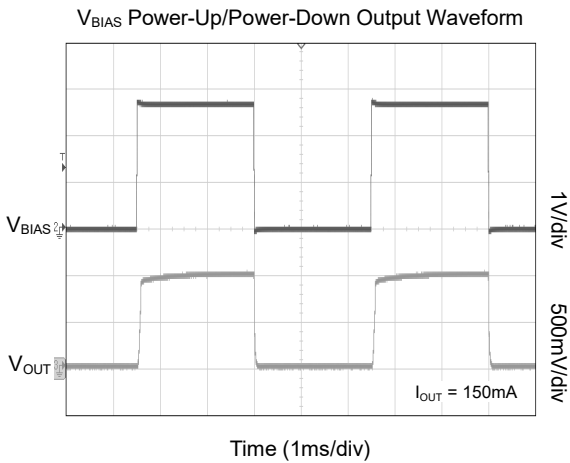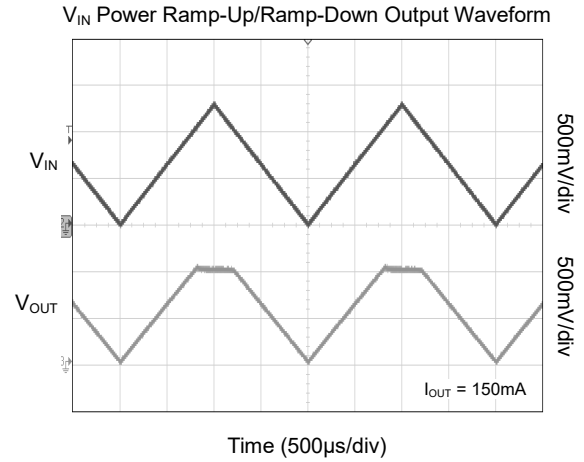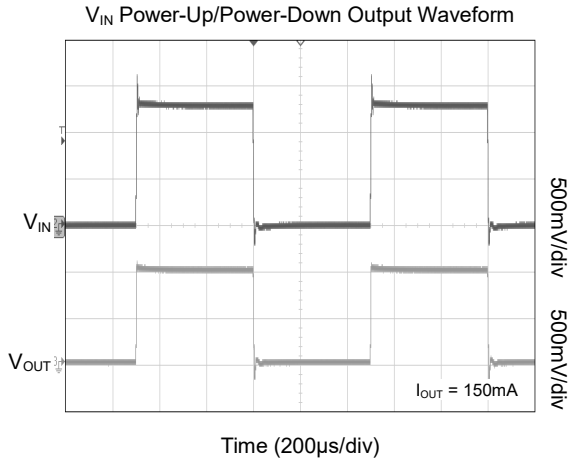

TYPICAL PERFORMANCE CHARACTERISTICS (continued)







$T_A = +25^\circ\text{C}$ ,  $V_{IN} = 1.3\text{V}$ ,  $V_{EN} = V_{BIAS} = 2.7\text{V}$ ,  $V_{OUT(NOM)} = 1.0\text{V}$ ,  $C_{IN} = 1\mu\text{F}$ ,  $C_{BIAS} = 0.1\mu\text{F}$ ,  $C_{OUT} = 2.2\mu\text{F}$ , unless otherwise noted.

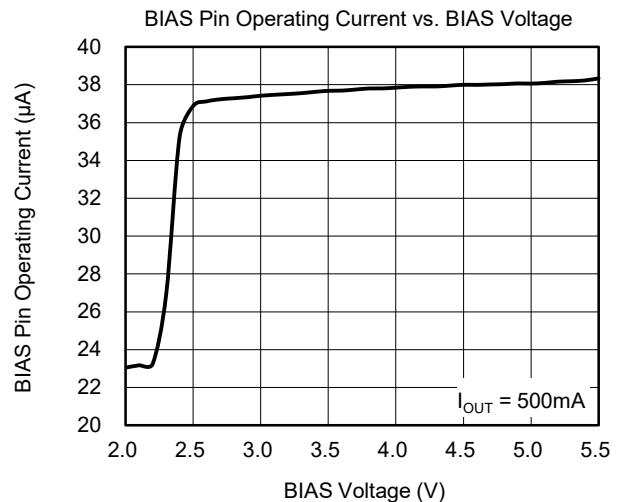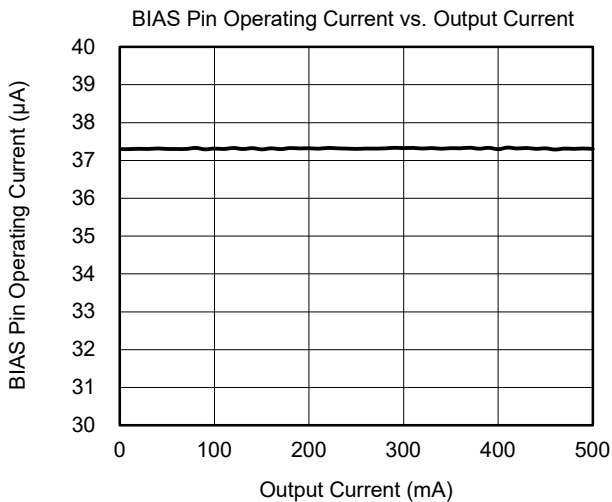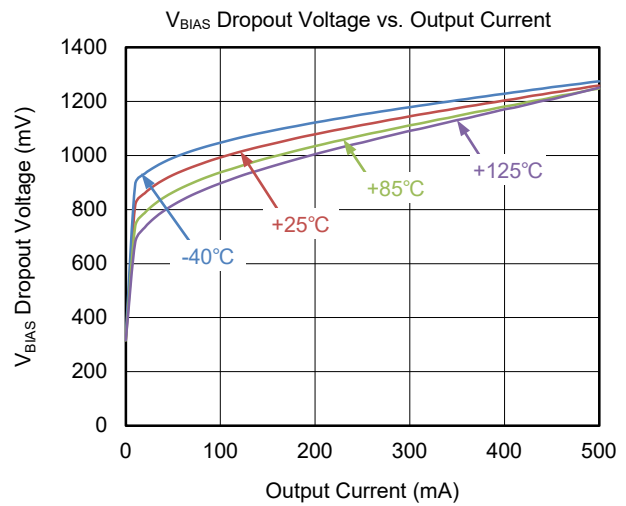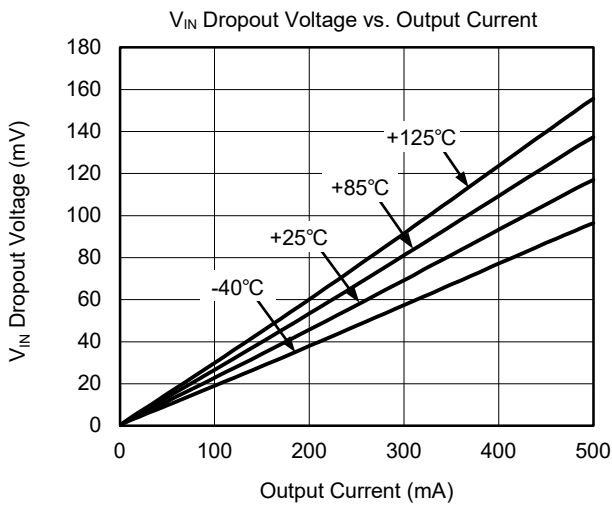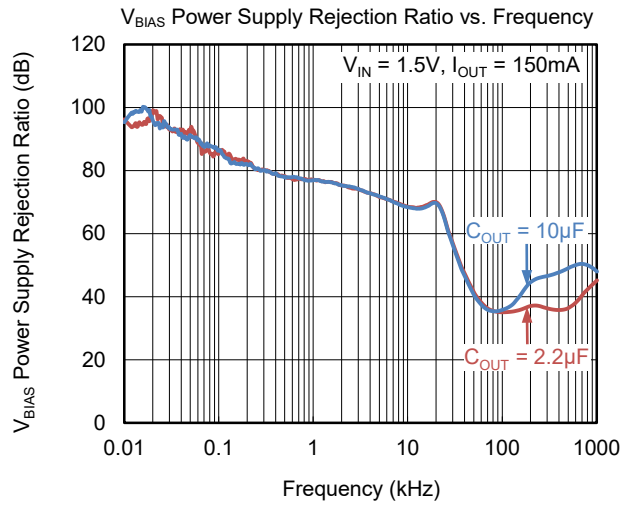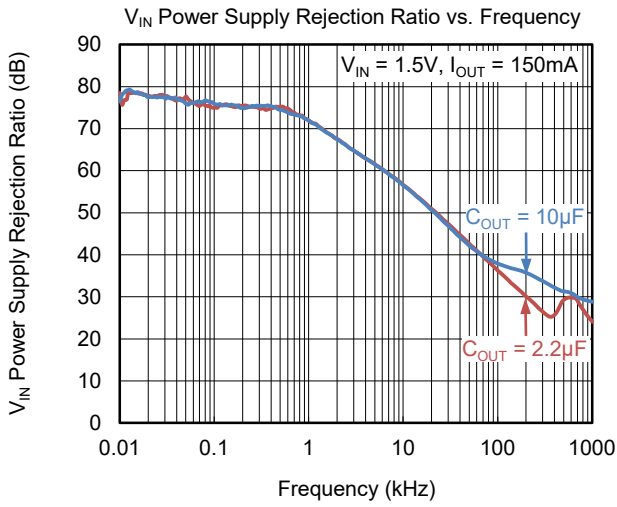



TYPICAL PERFORMANCE CHARACTERISTICS (continued)

T<sub>A</sub> = +25°C, V<sub>IN</sub> = 1.3V, V<sub>EN</sub> = V<sub>BIAS</sub> = 2.7V, V<sub>OUT(NOM)</sub> = 1.0V, C<sub>IN</sub> = 1μF, C<sub>BIAS</sub> = 0.1μF, C<sub>OUT</sub> = 2.2μF, unless otherwise noted.

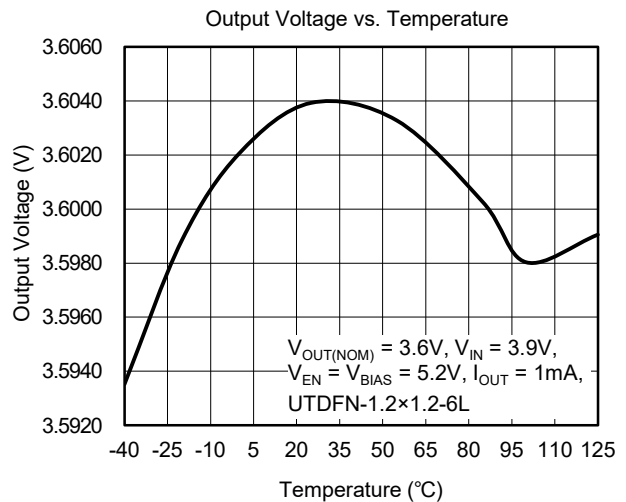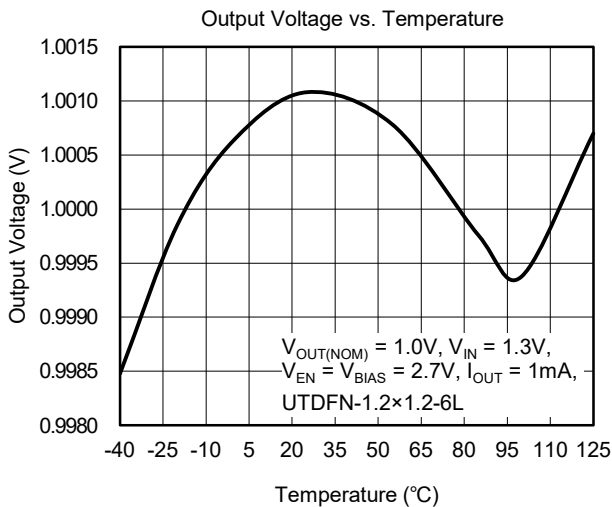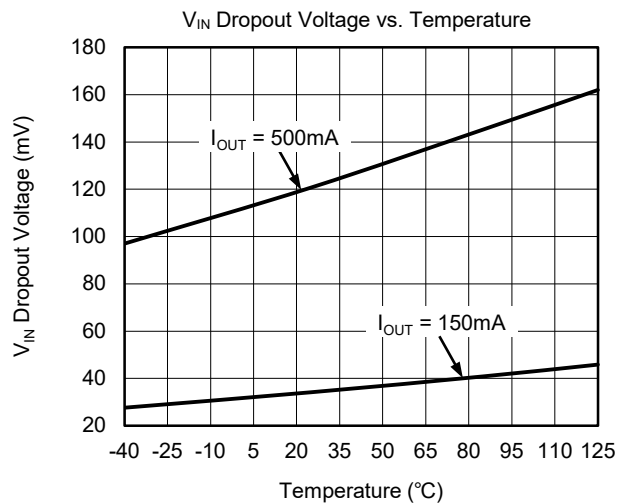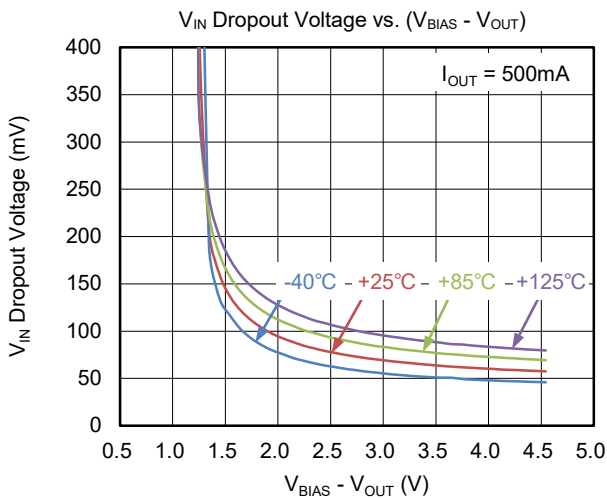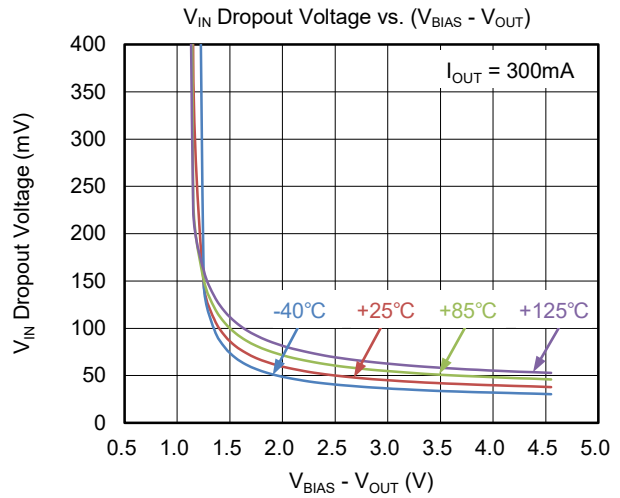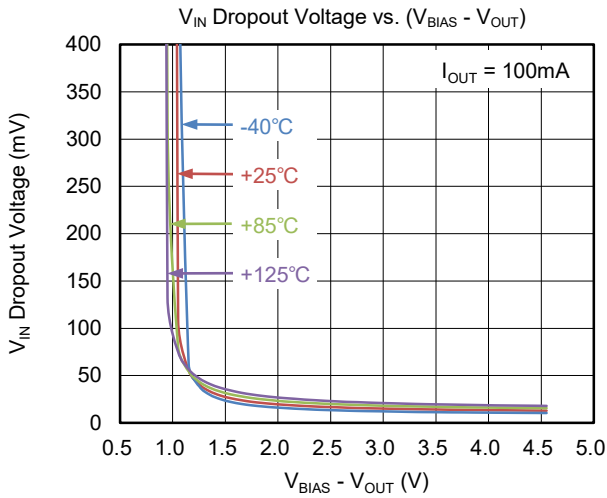

FUNCTIONAL BLOCK DIAGRAM

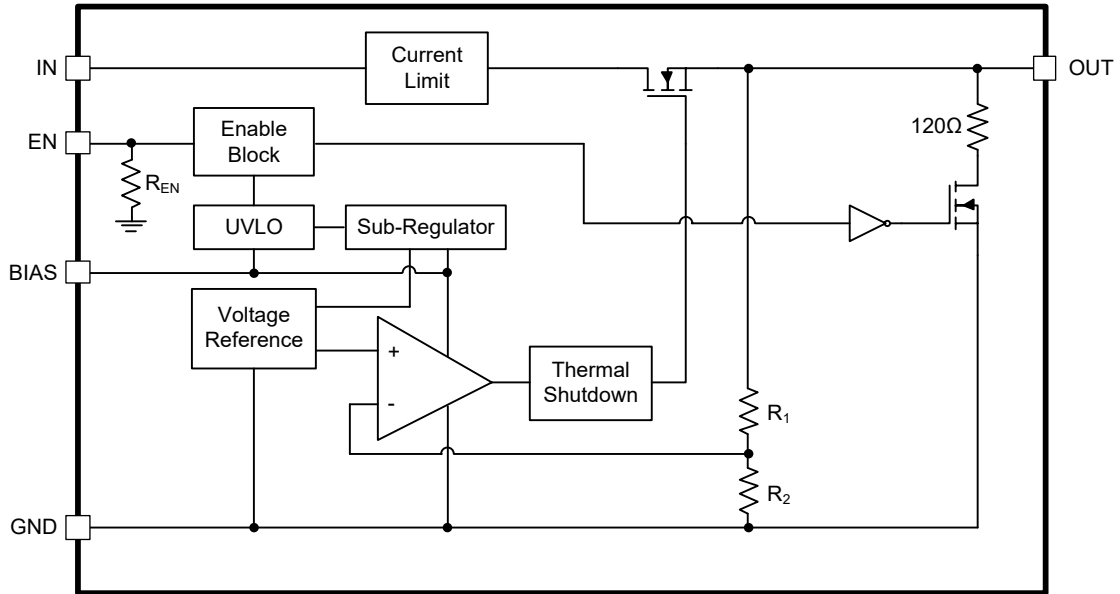


Figure 3. Fixed Version Block Diagram

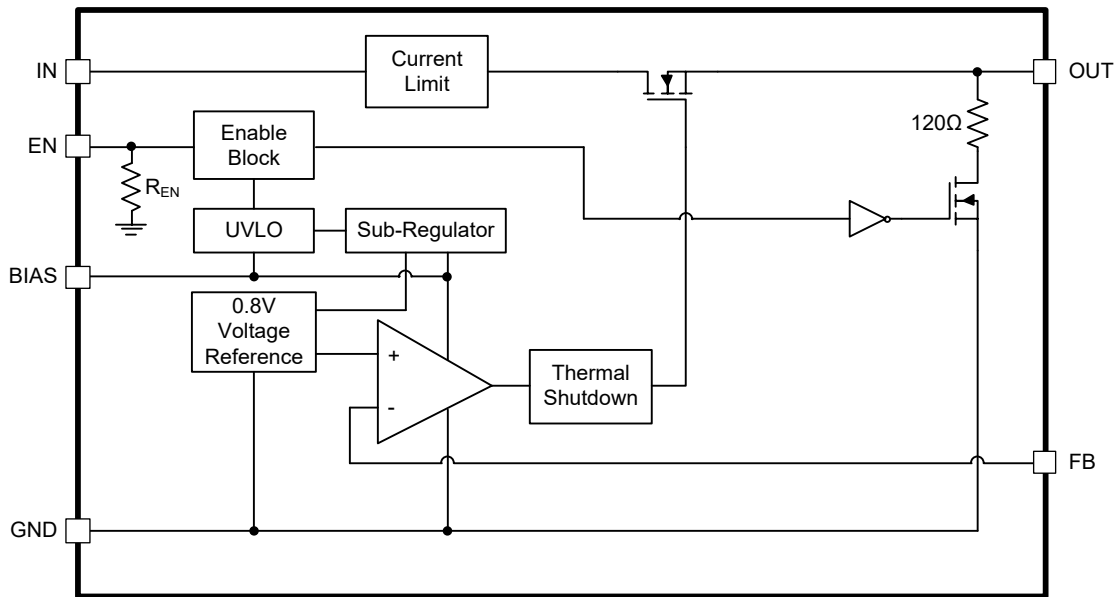


Figure 4. Adjustable Version Block Diagram

### APPLICATION INFORMATION

The SGM2037 dual-rail very low dropout voltage regulator is using NMOS pass transistor for output voltage regulation from  $V_{IN}$  voltage. All the low current internal control circuitry is powered from the  $V_{BIAS}$  voltage.

The use of an NMOS pass transistor offers several advantages in applications. Unlike PMOS topology devices, the output capacitor has reduced impact on loop stability.  $V_{IN}$  to  $V_{OUT}$  operating voltage difference can be very low compared with standard PMOS regulators in very low  $V_{IN}$  applications.

The SGM2037 offers smooth monotonic start-up. The controlled voltage rising limits the inrush current.

The enable (EN) input is equipped with internal hysteresis. The SGM2037 is available in fixed or adjustable version.

#### Setting the Output Voltage

The required output voltage of adjustable devices can be adjusted from 0.8V to 3.6V using two external resistors. Typical application circuit is shown in Figure 5.

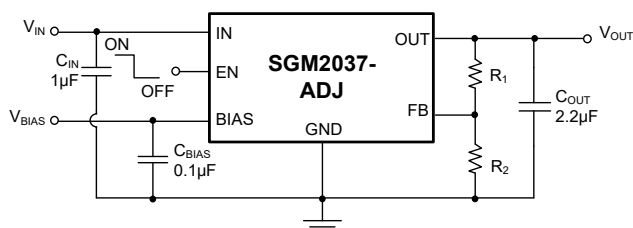


Figure 5. Typical Application Circuit

Choose  $R_2 = 40k\Omega$  to maintain a 20µA minimum load. Calculate the value for  $R_1$  using the following equation:

$$R_1 = R_2 \times \left( \frac{V_{OUT}}{0.8V} - 1 \right)$$

#### Dropout Voltage

Because of two power supplies  $V_{IN}$  and  $V_{BIAS}$  and one  $V_{OUT}$  regulator output, there are two dropout voltages specified.

The first, the  $V_{IN}$  dropout voltage is the voltage difference ( $V_{IN} - V_{OUT}$ ) when  $V_{OUT}$  starts to decrease by the percentage specified in the Electrical Characteristics table.  $V_{BIAS}$  is high enough; specific value is published in the Electrical Characteristics table.

The second,  $V_{BIAS}$  dropout voltage is the voltage difference ( $V_{BIAS} - V_{OUT}$ ) when IN and BIAS pins are joined together and  $V_{OUT}$  starts to decrease.

#### Input and Output Capacitors

The device is designed to be stable for ceramic output capacitors with effective capacitance in the range from 1µF to 10µF. The device is also stable with multiple capacitors in parallel, having the total effective capacitance in the specified range.

In applications where no low impedance input supplies available (PCB inductance in  $V_{IN}$  and/or  $V_{BIAS}$  inputs for example), the recommended  $C_{IN} = 1\mu F$  and  $C_{BIAS} = 0.1\mu F$  or greater. Ceramic capacitors are recommended. For the best performance all the capacitors should be connected to the SGM2037 respective pins directly in the device PCB copper layer, not through vias which have non-negligible impedance.

When using small ceramic capacitors, their capacitance is not constant but varies with applied DC biasing voltage, temperature and tolerance. The effective capacitance can be much lower than their nominal capacitance value and this is important in negative temperatures and higher LDO output voltages. That is the reason why the recommended output capacitor capacitance value is specified as effective value in the specific application conditions.

#### Enable Operation

The EN pin will turn the regulator ON or OFF. The threshold limits are covered in the Electrical Characteristics table in this datasheet.

#### Current Limit

The internal current limit circuitry allows the device to supply the full nominal current and surges but protects the device against current overload or short.

#### Thermal Protection

Internal thermal shutdown (TSD) circuitry is provided to protect the integrated circuit in the event that the maximum junction temperature is exceeded. When TSD is activated, the regulator output turns off. When cooling down below the low temperature threshold, device output is activated again. This TSD feature is provided to prevent failures from accidental overheating.

TYPICAL APPLICATION CIRCUIT

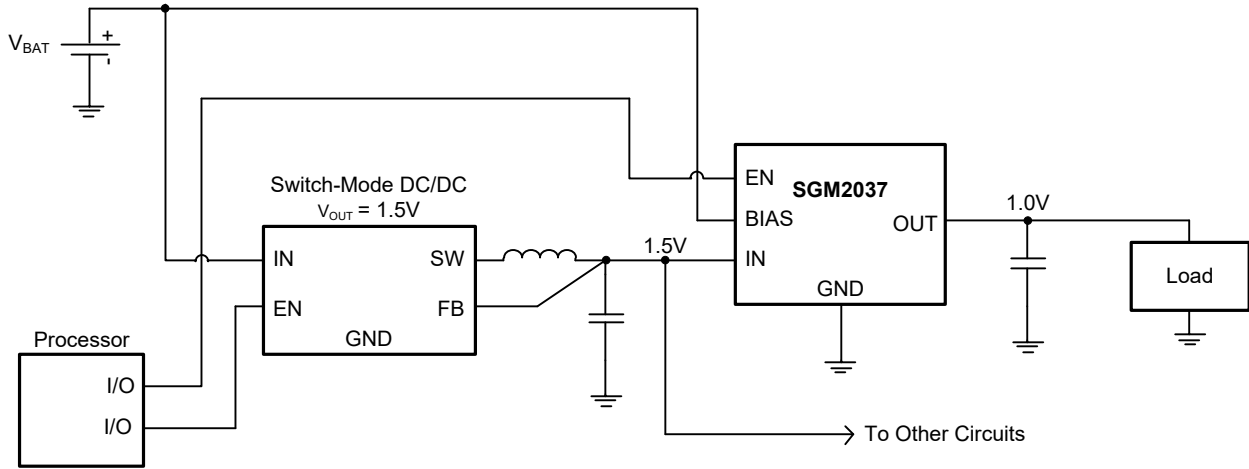


Figure 6. Used as DC/DC Post Regulator

REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.



Changes from Original (SEPTEMBER 2018) to REV.A

Changed from product preview to production data.....All



# PACKAGE INFORMATION

## PACKAGE OUTLINE DIMENSIONS

### SOT-23-5

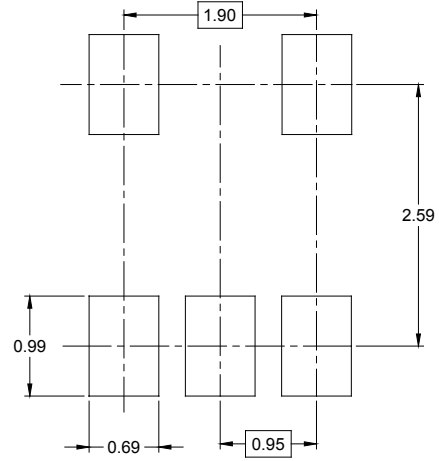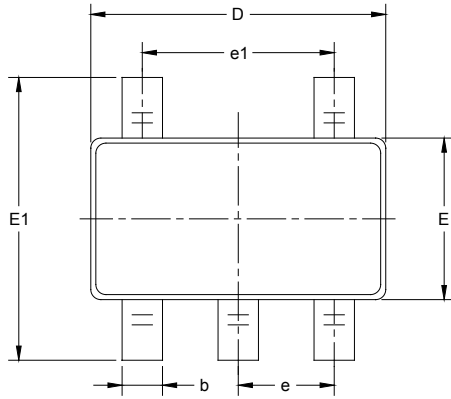



RECOMMENDED LAND PATTERN (Unit: mm)

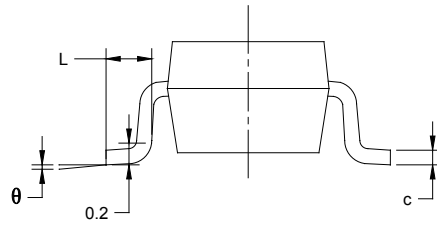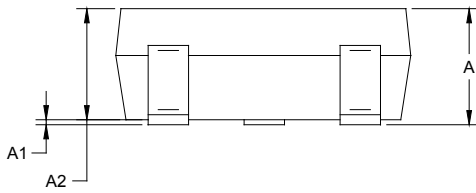



Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
$\theta$	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS

SOT-23-6

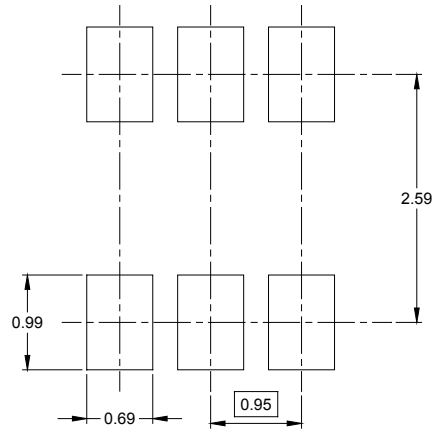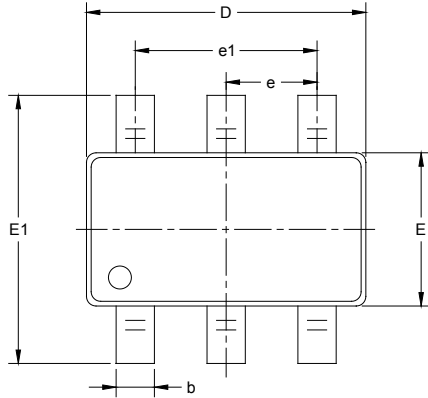


RECOMMENDED LAND PATTERN (Unit: mm)

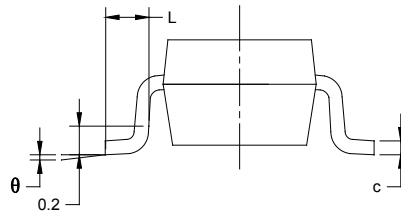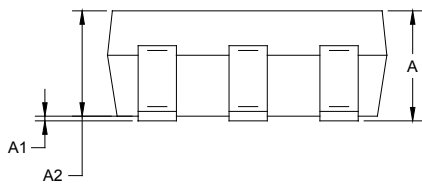


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950 BSC		0.037 BSC	
e1	1.900 BSC		0.075 BSC	
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°

PACKAGE OUTLINE DIMENSIONS


UTDFN-1.2x1.2-6L




TOP VIEW



BOTTOM VIEW



SIDE VIEW

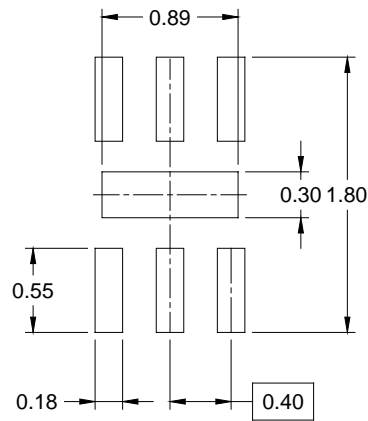


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.500	0.550	0.600
A1			0.050
A2	0.152 REF		
e	0.400 BSC		
D	1.150	1.200	1.250
E	1.150	1.200	1.250
D1	0.840	0.890	0.940
E1	0.250	0.300	0.350
b	0.130	0.180	0.230
L	0.200	0.250	0.300


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

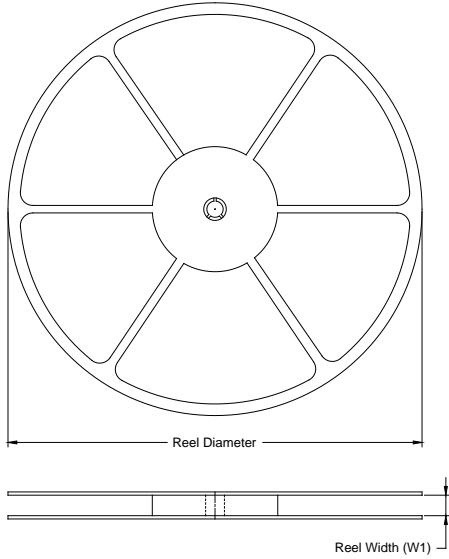

### TAPE DIMENSIONS

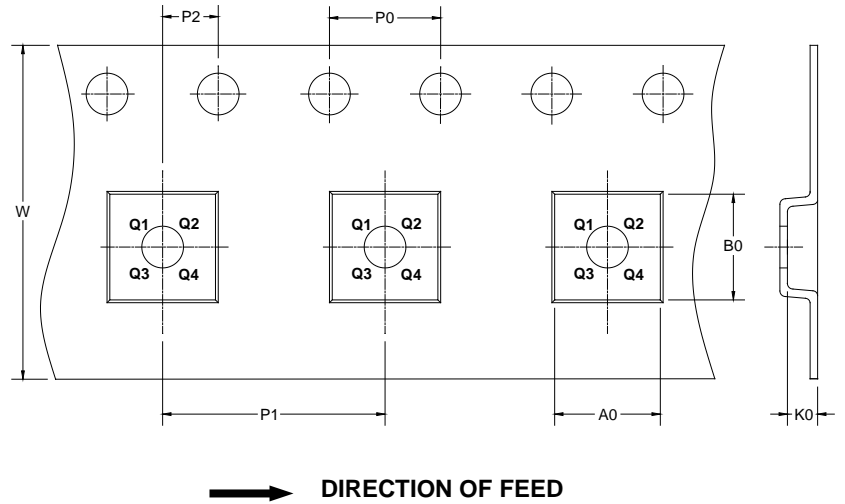

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL


Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
SOT-23-5	7"	9.5	3.20	3.20	1.40	4.0	4.0	2.0	8.0	Q3
SOT-23-6	7"	9.5	3.17	3.23	1.37	4.0	4.0	2.0	8.0	Q3
UTDFN-1.2x1.2-6L	7"	9.0	1.35	1.35	0.73	4.0	4.0	2.0	8.0	Q1

DD0001



# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS

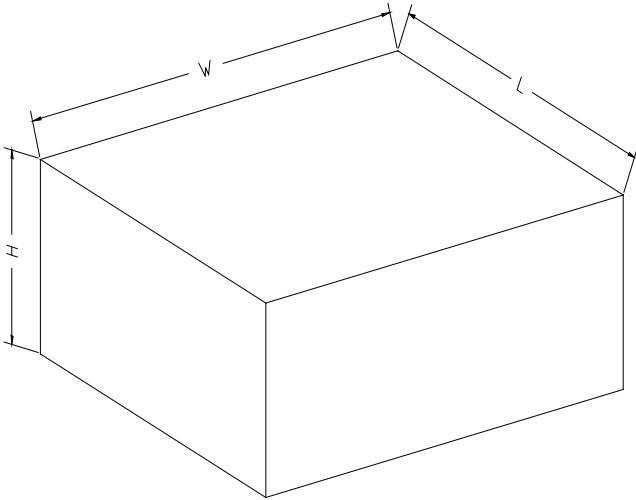

NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002