

# 74AVC8T245

## 8-Bit Dual-Supply Translating Transceiver with Configurable Voltage Translation; 3-State Outputs

---

### GENERAL DESCRIPTION

The 74AVC8T245 is an 8-bit, dual-supply translating transceiver that enables bidirectional level translation. It has one 8-bit input-output ports (An and Bn), a direction control (DIR) input, an output enable ( $\overline{OE}$ ) input and dual supply pins ( $V_{CCA}$  and  $V_{CCB}$ ).

Both  $V_{CCA}$  and  $V_{CCB}$  can be supplied at any voltage between 0.8V and 3.6V making the device suitable for low voltage bidirectional translation between 0.8V, 1.2V, 1.5V, 1.8V, 2.5V and 3.3V voltage nodes. Pins An,  $\overline{OE}$  and DIR are referenced to  $V_{CCA}$  and pins Bn are referenced to  $V_{CCB}$ . The direction control (DIR) input determines the direction of the data flow. The DIR (active high) enables data from An ports to Bn ports. The DIR (active low) enables data from Bn ports to An ports. The output enable ( $\overline{OE}$ ) input, when high, disables both An and Bn ports so the buses are effectively isolated.

The device is fully specified for partial power-down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry disables the output, preventing any damaging backflow current through the device when it is powered down. In suspend mode when either  $V_{CCA}$  or  $V_{CCB}$  is at GND level, both An and Bn ports are in the high-impedance state.

### FEATURES

- **Wide Supply Voltage Range:**
  - ◆  $V_{CCA}$ : 0.8V to 3.6V
  - ◆  $V_{CCB}$ : 0.8V to 3.6V
- **Typically Data Rates:**
  - ◆ 380Mbit/s ( $\geq$  1.8V to 3.3V Translation)
  - ◆ 260Mbit/s ( $\geq$  1.1V to 3.3V Translation)
  - ◆ 260Mbit/s ( $\geq$  1.1V to 2.5V Translation)
  - ◆ 210Mbit/s ( $\geq$  1.1V to 1.8V Translation)
  - ◆ 150Mbit/s ( $\geq$  1.1V to 1.5V Translation)
  - ◆ 100Mbit/s ( $\geq$  1.1V to 1.2V Translation)
- **Suspend Mode**
- **Inputs Accept Voltages up to 3.6V**
- **$I_{OFF}$  Circuitry Provides Partial Power-Down Mode Operation**
- **-40°C to +125°C Operating Temperature Range**
- **Available in a Green TQFN-5.5×3.5-24L Package**


**PACKAGE/ORDERING INFORMATION**

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
74AVC8T245	TQFN-5.5×3.5-24L	-40°C to +125°C	74AVC8T245XTQQ24G/TR	R43 XTQQ XXXXX	Tape and Reel, 3000

**MARKING INFORMATION**

NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

**XXXXX**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS <sup>(1)</sup>**

Supply Voltage Range, $V_{CCA}$ .....	-0.5V to 4.6V
Supply Voltage Range, $V_{CCB}$ .....	-0.5V to 4.6V
Input Voltage Range, $V_I$ <sup>(2)</sup> .....	-0.5V to 4.6V
Output Voltage Range, $V_O$	
Active Mode <sup>(2)(3)(4)</sup> .....	-0.5V to ( $V_{CCO} + 0.5V$ )
Suspend or 3-State Mode <sup>(2)</sup> .....	-0.5V to 4.6V
Output Current, $I_O$ ( $V_O = 0V$ to $V_{CC}$ ).....	±50mA
Supply Current, $I_{CC}$ , per $V_{CCA}$ or $V_{CCB}$ Pin.....	100mA
Ground Current, $I_{GND}$ , per GND Pin.....	-100mA
Input Clamp Current, $I_{IK}$ ( $V_I < 0$ ).....	-50mA
Output Clamp Current, $I_{OK}$ ( $V_O < 0$ ).....	-50mA
Continuous Output Current.....	±50mA
Junction Temperature <sup>(5)</sup> .....	+150°C
Storage Temperature Range.....	-65°C to +150°C
Lead Temperature (Soldering, 10s).....	+260°C
ESD Susceptibility	
HBM.....	8000V
CDM.....	1000V

**OVERSTRESS CAUTION**

1. Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.
2. The minimum input voltage ratings and output voltage ratings may be exceeded if the input and output current ratings are observed.
3.  $V_{CCO}$  is the supply voltage associated with the output port.
4.  $V_{CCO} + 0.5V$  should not exceed 4.6V.

5. The performance capability of a high-performance integrated circuit in conjunction with its thermal environment can create junction temperatures which are detrimental to reliability.

**RECOMMENDED OPERATING CONDITIONS**

Supply Voltage Range, $V_{CCA}$ .....	0.8V to 3.6V
Supply Voltage Range, $V_{CCB}$ .....	0.8V to 3.6V
Input Voltage Range, $V_I$ .....	0V to 3.6V
Output Voltage Range, $V_O$	
Active Mode <sup>(6)</sup> .....	0V to $V_{CCO}$
Suspend or 3-State Mode.....	0V to 3.6V
Input Transition Rise and Fall Rate, $\Delta t/\Delta V$ <sup>(7)</sup>	
$V_{CCI} = 0.8V$ to $3.6V$ .....	10ns/V (MAX)
Operating Temperature Range.....	-40°C to +125°C

NOTES:

6.  $V_{CCO}$  is the supply voltage associated with the output port.
7.  $V_{CCI}$  is the supply voltage associated with the input port.


**ESD SENSITIVITY CAUTION**

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

LOGIC SYMBOL

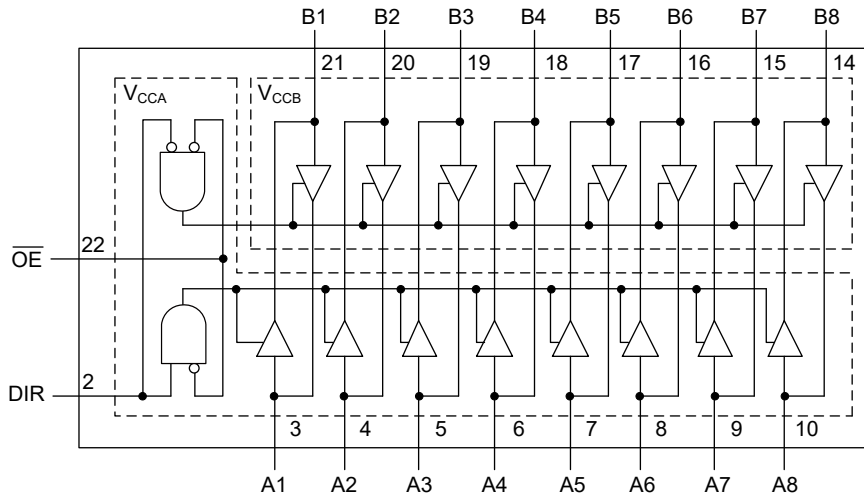


FUNCTION TABLE

SUPPLY VOLTAGE	CONTROL INPUT		INPUT/OUTPUT	
	$\overline{OE}$	DIR	A <sub>n</sub>	B <sub>n</sub>
V <sub>CCA</sub> , V <sub>CCB</sub> 0.8V to 3.6V	L	L	A <sub>n</sub> = B <sub>n</sub>	Inputs
0.8V to 3.6V	L	H	Inputs	B <sub>n</sub> = A <sub>n</sub>
0.8V to 3.6V	H	X	Z	Z
GND	X	X	Z	Z

H = High Voltage Level  
 L = Low Voltage Level  
 Z = High-Impedance State  
 X = Don't Care

## PIN CONFIGURATION

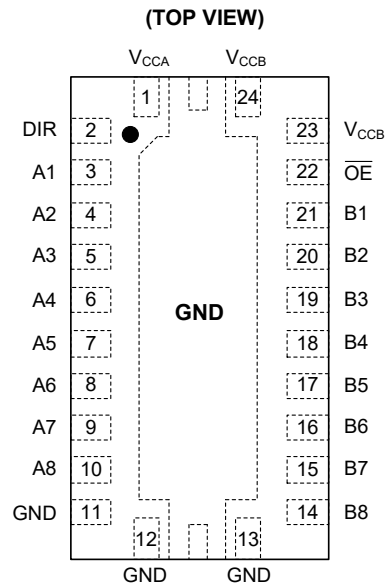

TQFN-5.5×3.5-24L

## PIN DESCRIPTION

PIN	NAME	FUNCTION
1	V <sub>CCA</sub>	Supply Voltage V <sub>CCA</sub> .
2	DIR	Direction Control Input.
3, 4, 5, 6, 7, 8, 9, 10	A1, A2, A3, A4, A5, A6, A7, A8	Data Inputs/Outputs.
11, 12, 13	GND	Ground.
14, 15, 16, 17, 18, 19, 20, 21	B8, B7, B6, B5, B4, B3, B2, B1	Data Inputs/Outputs.
22	$\overline{OE}$	Output Enable Input (Active Low).
23, 24	V <sub>CCB</sub>	Supply Voltage V <sub>CCB</sub> .

**ELECTRICAL CHARACTERISTICS**

(Full = -40°C to +125°C,  $V_{CCI}$  is the supply voltage associated with the data input port;  $V_{CCO}$  is the supply voltage associated with the output port, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	TEMP	MIN	TYP	MAX	UNITS	
High-Level Output Voltage	$V_{OH}$	$V_{CCA} = V_{CCB} = 0.8V$ , $V_I = V_{IH}$ , $I_O = -1.5mA$	+25°C		0.7		V	
Low-Level Output Voltage	$V_{OL}$	$V_{CCA} = V_{CCB} = 0.8V$ , $V_I = V_{IL}$ , $I_O = 1.5mA$	+25°C		0.1		V	
Input Leakage Current	$I_I$	$V_{CCA} = V_{CCB} = 0.8V$ to 3.6V, DIR, $\overline{OE}$ inputs, $V_I = 0V$ or 3.6V	Full		±0.01	±2	µA	
Off-State Output Current <sup>(1)</sup>	$I_{OZ}$	$V_{CCA} = V_{CCB} = 3.6V$ , A or B port, $V_O = 0V$ or $V_{CCO}$	Full		±0.01	±2	µA	
		$V_{CCA} = 3.6V$ , $V_{CCB} = 0V$ , suspend mode A port, $V_O = 0V$ or $V_{CCO}$	Full		±0.01	±2		
		$V_{CCA} = 0V$ , $V_{CCB} = 3.6V$ , suspend mode B port, $V_O = 0V$ or $V_{CCO}$	Full		±0.01	±2		
Power-Off Leakage Current	$I_{OFF}$	$V_{CCA} = 0V$ , $V_{CCB} = 0.8V$ to 3.6V, A port, $V_I$ or $V_O = 0V$ to 3.6V	Full		±0.01	±2	µA	
		$V_{CCB} = 0V$ , $V_{CCA} = 0.8V$ to 3.6V, B port, $V_I$ or $V_O = 0V$ to 3.6V	Full		±0.01	±2		
Input Capacitance	$C_I$	$V_{CCA} = V_{CCB} = 3.3V$ , DIR, $\overline{OE}$ inputs, $V_I = 0V$ or 3.3V	+25°C		5		pF	
Input/Output Capacitance	$C_{I/O}$	$V_{CCA} = V_{CCB} = 3.3V$ , A and B ports, $V_O = 3.3V$ or 0V	+25°C		8		pF	
Supply Current	$I_{CC}$	A port, $V_I = 0V$ or $V_{CCI}$ , $I_O = 0A$	$V_{CCA} = 0.8V$ to 3.6V, $V_{CCB} = 0.8V$ to 3.6V	Full		0.4	35	µA
			$V_{CCA} = 3.6V$ , $V_{CCB} = 0V$	Full		0.01	35	
			$V_{CCA} = 0V$ , $V_{CCB} = 3.6V$	Full	-12	-0.01		
		B port, $V_I = 0V$ or $V_{CCI}$ , $I_O = 0$	$V_{CCA} = 0.8V$ to 3.6V, $V_{CCB} = 0.8V$ to 3.6V	Full		0.4	35	
			$V_{CCA} = 3.6V$ , $V_{CCB} = 0V$	Full	-12	-0.01		
			$V_{CCA} = 0V$ , $V_{CCB} = 3.6V$	Full		0.01	35	
		A plus B port ( $I_{CCA} + I_{CCB}$ ), $I_O = 0A$ , $V_I = 0V$ or $V_{CCI}$ , $V_{CCA} = 0.8V$ to 3.6V, $V_{CCB} = 0.8V$ to 3.6V		Full		0.8	45	
A plus B port ( $I_{CCA} + I_{CCB}$ ), $I_O = 0A$ , $V_I = 0V$ or $V_{CCI}$ , $V_{CCA} = 1.1V$ to 3.6V, $V_{CCB} = 1.1V$ to 3.6V		Full		0.8	45			

## NOTE:

1. For I/O ports, the parameter  $I_{OZ}$  includes the input leakage current.

**ELECTRICAL CHARACTERISTICS (continued)**

(Full = -40°C to +125°C,  $V_{CCI}$  is the supply voltage associated with the data input port;  $V_{CCO}$  is the supply voltage associated with the output port, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS		TEMP	MIN	TYP	MAX	UNITS
High-Level Input Voltage	$V_{IH}$	Data inputs	$V_{CCI} = 0.8V$	Full	$0.8 \times V_{CCI}$			V
			$V_{CCI} = 1.1V$ to $1.95V$	Full	$0.7 \times V_{CCI}$			
			$V_{CCI} = 2.3V$ to $2.7V$	Full	1.6			
			$V_{CCI} = 3.0V$ to $3.6V$	Full	2			
		DIR, $\overline{OE}$ inputs	$V_{CCA} = 0.8V$	Full	$0.8 \times V_{CCA}$			
			$V_{CCA} = 1.1V$ to $1.95V$	Full	$0.7 \times V_{CCA}$			
			$V_{CCA} = 2.3V$ to $2.7V$	Full	1.6			
			$V_{CCA} = 3.0V$ to $3.6V$	Full	2			
Low-Level Input Voltage	$V_{IL}$	Data inputs	$V_{CCI} = 0.8V$	Full			$0.3 \times V_{CCI}$	V
			$V_{CCI} = 1.1V$ to $1.95V$	Full			$0.35 \times V_{CCI}$	
			$V_{CCI} = 2.3V$ to $2.7V$	Full			0.7	
			$V_{CCI} = 3.0V$ to $3.6V$	Full			0.8	
		DIR, $\overline{OE}$ inputs	$V_{CCA} = 0.8V$	Full			$0.3 \times V_{CCA}$	
			$V_{CCA} = 1.1V$ to $1.95V$	Full			$0.35 \times V_{CCA}$	
			$V_{CCA} = 2.3V$ to $2.7V$	Full			0.7	
			$V_{CCA} = 3.0V$ to $3.6V$	Full			0.8	
High-Level Output Voltage	$V_{OH}$	$V_I = V_{IH}$	$I_O = -100\mu A, V_{CCA} = V_{CCB} = 0.8V$ to $3.6V$	Full	$V_{CCO} - 0.1$			V
			$I_O = -3mA, V_{CCA} = V_{CCB} = 1.1V$	Full	0.85	1		
			$I_O = -6mA, V_{CCA} = V_{CCB} = 1.4V$	Full	1.05	1.26		
			$I_O = -8mA, V_{CCA} = V_{CCB} = 1.65V$	Full	1.2	1.5		
			$I_O = -9mA, V_{CCA} = V_{CCB} = 2.3V$	Full	1.75	2.1		
			$I_O = -12mA, V_{CCA} = V_{CCB} = 3.0V$	Full	2.3	2.8		
Low-Level Output Voltage	$V_{OL}$	$V_I = V_{IL}$	$I_O = 100\mu A, V_{CCA} = V_{CCB} = 0.8V$ to $3.6V$	Full			0.1	V
			$I_O = 3mA, V_{CCA} = V_{CCB} = 1.1V$	Full		0.11	0.25	
			$I_O = 6mA, V_{CCA} = V_{CCB} = 1.4V$	Full		0.19	0.35	
			$I_O = 8mA, V_{CCA} = V_{CCB} = 1.65V$	Full		0.22	0.45	
			$I_O = 9mA, V_{CCA} = V_{CCB} = 2.3V$	Full		0.22	0.55	
			$I_O = 12mA, V_{CCA} = V_{CCB} = 3.0V$	Full		0.28	0.7	

# 8-Bit Dual-Supply Translating Transceiver with 74AVC8T245 Configurable Voltage Translation; 3-State Outputs

## ELECTRICAL CHARACTERISTICS (continued)

### Typical Total Supply Current ( $I_{CCA} + I_{CCB}$ )

( $T_A = +25^\circ\text{C}$ , unless otherwise noted.)

$V_{CCA}$	$V_{CCB}$							UNITS
	0V	0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
0V	0	0.01	0.01	0.01	0.01	0.01	0.01	$\mu\text{A}$
0.8V	0.01	0.05	0.05	0.05	0.05	0.2	0.6	$\mu\text{A}$
1.2V	0.01	0.05	0.05	0.05	0.05	0.1	0.4	$\mu\text{A}$
1.5V	0.01	0.05	0.05	0.05	0.05	0.05	0.3	$\mu\text{A}$
1.8V	0.01	0.05	0.05	0.05	0.05	0.05	0.2	$\mu\text{A}$
2.5V	0.01	0.2	0.1	0.1	0.05	0.05	0.05	$\mu\text{A}$
3.3V	0.01	0.6	0.4	0.3	0.2	0.05	0.03	$\mu\text{A}$

### Typical Power Dissipation Capacitance

( $T_A = +25^\circ\text{C}$ ,  $V_{CCA} = V_{CCB}$ , unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	$V_{CCA} = V_{CCB}$						UNITS
			0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
Power Dissipation Capacitance <sup>(1)(2)</sup>	$C_{PD}$	A port: (direction An to Bn), output enabled	1.1	1.1	1.2	1.2	1.3	1.4	pF
		A port: (direction An to Bn), output disabled	0.6	0.7	0.7	0.7	0.8	0.9	
		A port: (direction Bn to An), output enabled	13.3	13.5	13.5	13.7	14.5	15.3	
		A port: (direction Bn to An), output disabled	0.5	0.5	0.5	0.5	0.5	0.5	
		B port: (direction An to Bn), output enabled	13.7	13.7	14.0	14.3	15.0	15.7	
		B port: (direction An to Bn), output disabled	0.5	0.5	0.5	0.5	0.5	0.5	
		B port: (direction Bn to An), output enabled	1.1	1.1	1.2	1.2	1.3	1.4	
		B port: (direction Bn to An), output disabled	0.6	0.7	0.7	0.7	0.8	0.9	

#### NOTES:

- $C_{PD}$  is used to determine the dynamic power dissipation ( $P_D$  in  $\mu\text{W}$ ).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$$

where:

$f_i$  = Input frequency in MHz.

$f_o$  = Output frequency in MHz.

$C_L$  = Output load capacitance in pF.

$V_{CC}$  = Supply voltage in Volts.

$N$  = Number of inputs switching.

$\Sigma(C_L \times V_{CC}^2 \times f_o)$  = Sum of the outputs.

- $f_i = 10\text{MHz}$ ;  $V_i = \text{GND to } V_{CC}$ ;  $t_R = t_F = 1\text{ns}$ ;  $C_L = 0\text{pF}$ ;  $R_L = \infty$ .

# 8-Bit Dual-Supply Translating Transceiver with 74AVC8T245 Configurable Voltage Translation; 3-State Outputs

## DYNAMIC CHARACTERISTICS

### Typical Dynamic Characteristics at $V_{CCA} = 0.8V$ and $T_A = +25^\circ C$

(For test circuit, see Figure 1, for waveforms see Figure 2 and Figure 3, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	$V_{CCB}$						UNITS
			0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
Propagation Delay	$t_{PD}$	An to Bn	43	20	18	17	17	17	ns
		Bn to An	38	32	31	30	29	29	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	37	37	35	35	35	33	ns
		$\overline{OE}$ to Bn	47	30	30	29	25	24	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	44	43	43	42	42	42	ns
		$\overline{OE}$ to Bn	51	24	22	21	21	21	

NOTE:

1.  $t_{PD}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ ;  $t_{DIS}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ ;  $t_{EN}$  is the same as  $t_{PZL}$  and  $t_{PZH}$ .

### Typical Dynamic Characteristics at $V_{CCB} = 0.8V$ and $T_A = +25^\circ C$

(For test circuit, see Figure 1, for waveforms see Figure 2 and Figure 3, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	$V_{CCA}$						UNITS
			0.8V	1.2V	1.5V	1.8V	2.5V	3.3V	
Propagation Delay	$t_{PD}$	An to Bn	43	34	33	32	31	31	ns
		Bn to An	38	20	18	17	17	16	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	37	14	11	9	8	6	ns
		$\overline{OE}$ to Bn	47	34	30	30	27	26	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	44	13	14	7	5	4	ns
		$\overline{OE}$ to Bn	51	40	44	47	61	35	

NOTE:

1.  $t_{PD}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ ;  $t_{DIS}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ ;  $t_{EN}$  is the same as  $t_{PZL}$  and  $t_{PZH}$ .



# 8-Bit Dual-Supply Translating Transceiver with 74AVC8T245 Configurable Voltage Translation; 3-State Outputs

## DYNAMIC CHARACTERISTICS (continued)

### Typical Dynamic Characteristics at $T_A = +25^\circ\text{C}$


(For test circuit, see Figure 1, for waveforms see Figure 2 and Figure 3, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	$V_{CCB}$					UNITS
			1.2V $\pm$ 0.1V	1.5V $\pm$ 0.1V	1.8V $\pm$ 0.15V	2.5V $\pm$ 0.2V	3.3V $\pm$ 0.3V	
			TYP	TYP	TYP	TYP	TYP	
<b><math>V_{CCA} = 1.1V</math> to <math>1.3V</math></b>								
Propagation Delay	$t_{PD}$	An to Bn	12	10	9	9	8	ns
		Bn to An	12	9	8	8	7	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	12	13	13	13	14	ns
		$\overline{OE}$ to Bn	16	14	13	12	12	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	14	15	14	14	14	ns
		$\overline{OE}$ to Bn	16	12	11	11	10	
<b><math>V_{CCA} = 1.4V</math> to <math>1.6V</math></b>								
Propagation Delay	$t_{PD}$	An to Bn	10	7	7	6	5	ns
		Bn to An	10	7	6	6	5	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	8	9	9	8	9	ns
		$\overline{OE}$ to Bn	12	10	9	8	8	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	8	8	8	8	8	ns
		$\overline{OE}$ to Bn	12	8	8	7	7	
<b><math>V_{CCA} = 1.65V</math> to <math>1.95V</math></b>								
Propagation Delay	$t_{PD}$	An to Bn	9	7	6	5	5	ns
		Bn to An	9	6	6	5	5	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	7	6	7	7	7	ns
		$\overline{OE}$ to Bn	12	9	9	8	7	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	6	6	6	6	6	ns
		$\overline{OE}$ to Bn	11	7	6	5	5	
<b><math>V_{CCA} = 2.3V</math> to <math>2.7V</math></b>								
Propagation Delay	$t_{PD}$	An to Bn	8	6	6	4	4	ns
		Bn to An	9	5	5	4	4	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	6	6	6	6	6	ns
		$\overline{OE}$ to Bn	12	9	8	6	6	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	4	4	4	4	4	ns
		$\overline{OE}$ to Bn	10	6	6	5	4	
<b><math>V_{CCA} = 3.0V</math> to <math>3.6V</math></b>								
Propagation Delay	$t_{PD}$	An to Bn	8	5	4	4	4	ns
		Bn to An	8	5	5	4	4	
Disable Time	$t_{DIS}$	$\overline{OE}$ to An	5	5	5	5	5	ns
		$\overline{OE}$ to Bn	11	9	8	7	6	
Enable Time	$t_{EN}$	$\overline{OE}$ to An	9	6	5	4	4	ns
		$\overline{OE}$ to Bn	9	6	5	4	4	

**NOTE:**

1.  $t_{PD}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ ;  $t_{DIS}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ ;  $t_{EN}$  is the same as  $t_{PZL}$  and  $t_{PZH}$ .

TEST CIRCUIT

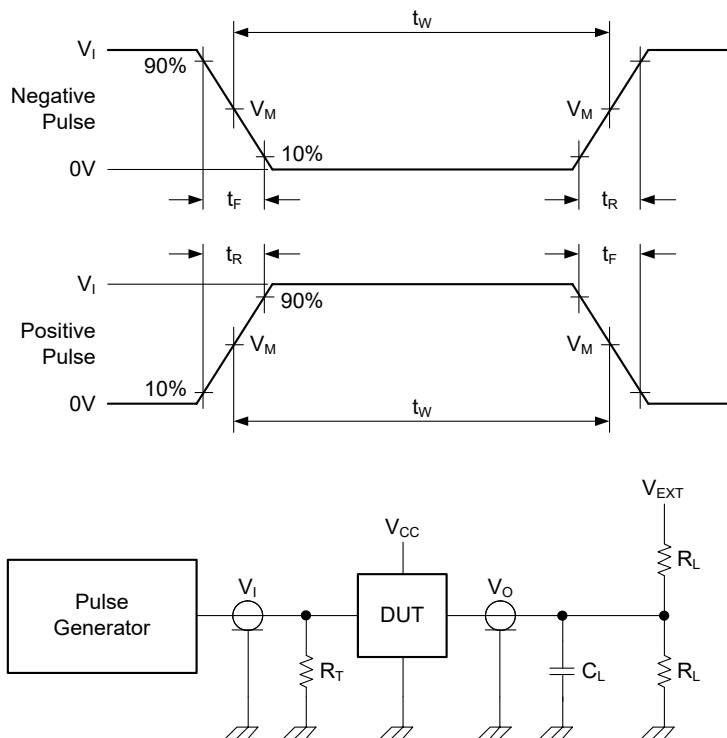

Test conditions are given in Table 1.

Definitions for test circuit:

$R_L$  = Load resistance.

$C_L$  = Load capacitance including jig and probe capacitance.

$R_T$  = Termination resistance should be equal to output impedance  $Z_O$  of the pulse generator.

$V_{EXT}$  = External voltage for measuring switching times.

Figure 1. Test Circuit for Measuring Switching Times


Table 1. Test Conditions

SUPPLY VOLTAGE	INPUT		LOAD		$V_{EXT}$		
	$V_I^{(1)}$	$\Delta t/\Delta V^{(2)}$	$C_L$	$R_L$	$t_{PLH}, t_{PHL}$	$t_{PZH}, t_{PHZ}$	$t_{PZL}, t_{PLZ}^{(3)}$
0.8V to 1.6V	$V_{CCI}$	$\leq 1.0\text{ns/V}$	15pF	2k $\Omega$	Open	GND	$2 \times V_{CCO}$
1.65V to 2.7V	$V_{CCI}$	$\leq 1.0\text{ns/V}$	15pF	2k $\Omega$	Open	GND	$2 \times V_{CCO}$
3.0V to 3.6V	$V_{CCI}$	$\leq 1.0\text{ns/V}$	15pF	2k $\Omega$	Open	GND	$2 \times V_{CCO}$

NOTES:


- $V_{CCI}$  is the supply voltage associated with the data input port.
- $dV/dt \geq 1.0\text{V/ns}$
- $V_{CCO}$  is the supply voltage associated with the output port.

WAVEFORMS

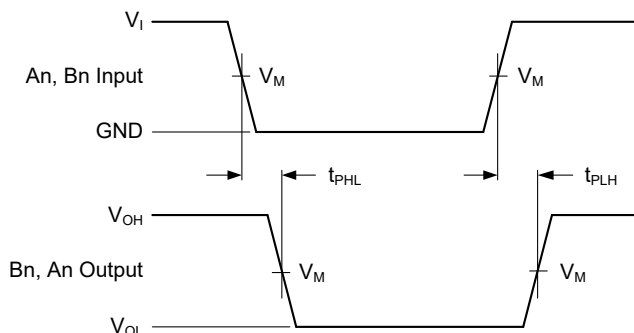

Test conditions are given in Table 1.  
 Measurement points are given in Table 2.  
 $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

Figure 2. Input (An, Bn) to Output (Bn, An) Propagation Delay Times

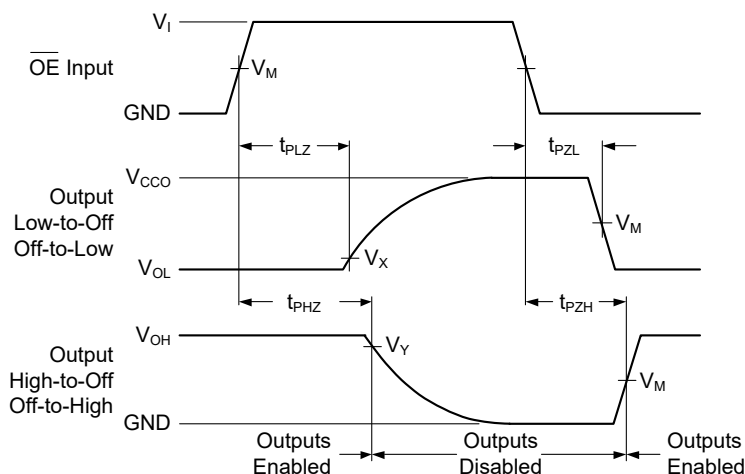

Test conditions are given in Table 1.  
 Measurement points are given in Table 2.  
 $V_{OL}$  and  $V_{OH}$  are typical output voltage levels that occur with the output load.

Figure 3. Enable and Disable Times

Table 2. Measurement Points

SUPPLY VOLTAGE	INPUT <sup>(1)</sup>	OUTPUT <sup>(2)</sup>		
$V_{CCA}, V_{CCB}$	$V_M$	$V_M$	$V_X$	$V_Y$
0.8V to 1.6V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.1V$	$V_{OH} - 0.1V$
1.65V to 2.7V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.15V$	$V_{OH} - 0.15V$
3.0V to 3.6V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.3V$	$V_{OH} - 0.3V$

- NOTES:
- $V_{CCI}$  is the supply voltage associated with the data input port.
  - $V_{CCO}$  is the supply voltage associated with the output port.

**REVISION HISTORY**


NOTE: Page numbers for previous revisions may differ from page numbers in the current version.

<b>Changes from Original (MARCH 2021) to REV.A</b>	<b>Page</b>
Changed from product preview to production data.....	All


---

PACKAGE OUTLINE DIMENSIONS


TQFN-5.5×3.5-24L




TOP VIEW

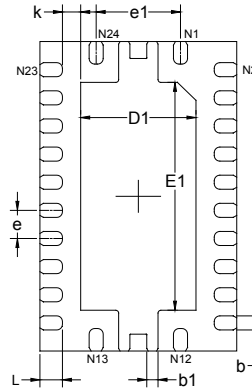

BOTTOM VIEW



SIDE VIEW

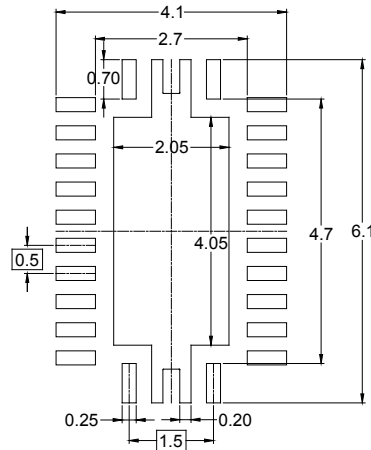


RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.700	0.800	0.028	0.031
A1	0.000	0.050	0.000	0.002
A2	0.203 REF		0.008 REF	
D	3.400	3.600	0.134	0.142
D1	1.950	2.150	0.077	0.085
E	5.400	5.600	0.213	0.220
E1	3.950	4.150	0.156	0.163
k	0.325 REF		0.013 REF	
b	0.200	0.300	0.008	0.012
b1	0.150	0.250	0.006	0.010
L	0.300	0.500	0.012	0.020
e	0.500 BSC		0.020 BSC	
e1	1.500 BSC		0.059 BSC	


# PACKAGE INFORMATION

## TAPE AND REEL INFORMATION

### REEL DIMENSIONS

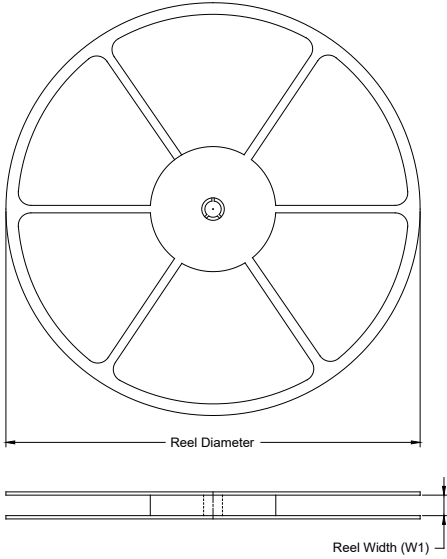

### TAPE DIMENSIONS

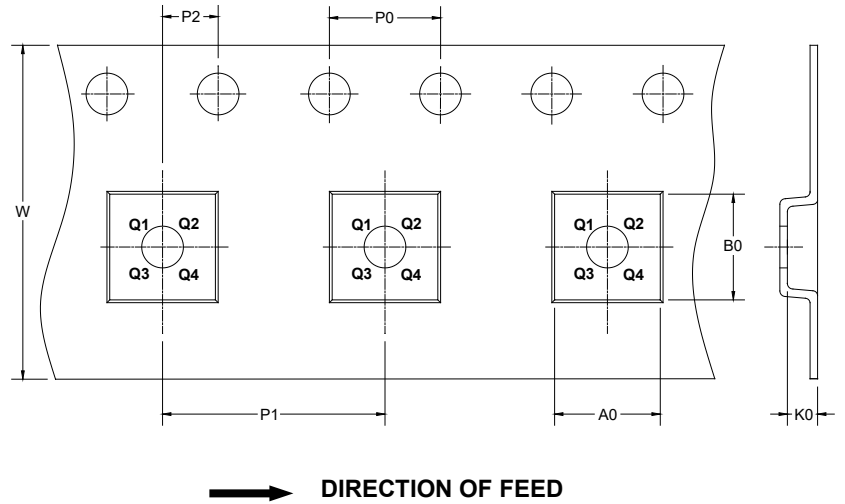

NOTE: The picture is only for reference. Please make the object as the standard.

### KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TQFN-5.5×3.5-24L	13"	12.4	3.80	5.80	1.00	4.0	8.0	2.0	12.0	Q1

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002