



# SGM4522Q

## Automotive, Bidirectional 8:1, 5V, 1-Channel Multiplexer with Injection Current Control

### GENERAL DESCRIPTION

The SGM4522Q is a single 8-channel CMOS analog multiplexer with injection current control. The device has three control inputs that can be used as selecting one of the 8 channels (Sx) to connect to the common terminal (Dx). The multiplexer supports bidirectional signal transmission in the voltage range from GND to  $V_{DD}$ .

All logic inputs of the SGM4522Q are allowed to be equal to the power supply voltage and compatible with TTL and CMOS logic thresholds standards during normal operation of the power supply. Besides, all control inputs are also designed with fail-safe function. It allows the voltage of all control pins within the maximum absolute withstand voltage range to exceed the  $V_{DD}$  without damaging the device.

The injection current control function of the SGM4522Q allows signals on disabled signal channels to exceed the  $V_{DD}$  without affecting the enabled signal channel. In addition, all pins of the SGM4522Q except GND are not designed with internal diodes path to the  $V_{DD}$  pin, so as not to damage the components connected to the power pin and avoid injecting reverse current into the power supply.

The device is AEC-Q100 qualified (Automotive Electronics Council (AEC) standard Q100 Grade 1) and it is suitable for automotive applications.

The SGM4522Q is available in Green TSSOP-16 and TQFN-2.5×3.5-16AL packages. It operates over an operating temperature range of  $-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$ .

### FEATURES

- **AEC-Q100 Qualified for Automotive Applications**  
Device Temperature Grade 1  
 $T_A = -40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$
- **$V_{DD}$  Operation Range: 1.62V to 5.5V**
- **Injection Current Control**
- **Back-Powering Protection**  
No ESD Diodes between All Ports and  $V_{DD}$
- **Bidirectional Signal Path**
- **Rail-to-Rail Operation**
- **Control Pin Fail-Safe Function**
- **Break-Before-Make Switching**
- **$-40^{\circ}\text{C}$  to  $+125^{\circ}\text{C}$  Operating Temperature Range**
- **Available in Green TSSOP-16 and TQFN-2.5×3.5-16AL Packages**

### APPLICATIONS

Automotive System  
Battery Management Systems (BMS)  
Signal Multiplexing and Demultiplexing  
Diagnostics and Monitoring in Automotive  
ADC and DAC System

# Automotive, Bidirectional 8:1, 5V, SGM4522Q 1-Channel Multiplexer with Injection Current Control

## PACKAGE/ORDERING INFORMATION


MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE TOP MARKING	PACKING OPTION
SGM4522Q	TSSOP-16	-40°C to +125°C	SGM4522QTS16G/TR	0DNTS16 XXXXX	Tape and Reel, 4000
	TQFN-2.5×3.5-16AL	-40°C to +125°C	SGM4522QTVF16G/TR	0NGTVF XXXXX YYYYYY	Tape and Reel, 8000

## MARKING INFORMATION


NOTE: XXXXX = Date Code, Trace Code and Vendor Code.

### TSSOP-16


**XXXXX**



### TQFN-2.5×3.5-16AL



**XXXXX  
YYYYYY**



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

**ABSOLUTE MAXIMUM RATINGS**

Supply Voltage Range, $V_{DD}$ .....	-0.5V to 6V
Logic Control Input Pin Voltage ( $\overline{EN}$ , A0, A1, A2), $V_{SEL}$ or $V_{EN}$ .....	-0.5V to 6V
Source or Drain Voltage, $V_S$ or $V_D$ .....	-0.5V to ( $V_{DD} + 0.5V$ )
Continuous Current through Switch (Sx, D Pins), $I_S$ or $I_{D(CONT)}$ .....	-40°C to +125°C..... -50mA to 50mA
Continuous Current through GND, $I_{GND}$ ....	-100mA to 100mA
Package Thermal Resistance	
TSSOP-16, $\theta_{JA}$ .....	130.8°C/W
TSSOP-16, $\theta_{JB}$ .....	88.2°C/W
TSSOP-16, $\theta_{JC}$ .....	53.6°C/W
TQFN-2.5×3.5-16AL, $\theta_{JA}$ .....	63.8°C/W
TQFN-2.5×3.5-16AL, $\theta_{JB}$ .....	25.4°C/W
TQFN-2.5×3.5-16AL, $\theta_{JC(TOP)}$ .....	51.3°C/W
TQFN-2.5×3.5-16AL, $\theta_{JC(BOT)}$ .....	7.3°C/W
Junction Temperature .....	+150°C
Storage Temperature Range .....	-65°C to +150°C
Lead Temperature (Soldering, 10s) .....	+260°C
ESD Susceptibility	
HBM .....	4000V
CDM .....	1000V

**RECOMMENDED OPERATING CONDITIONS**

Supply Voltage Range, $V_{DD}$ .....	1.62V to 5.5V
Signal Path Input/Output Voltage, $V_S$ or $V_D$ .....	0V to $V_{DD}$
Logic Control Input Pin Voltage ( $\overline{EN}$ , A0, A1, A2), $V_{SEL}$ or $V_{EN}$ .....	0V to 5.5V
Continuous Current through Switch (Sx, D Pins), $I_S$ or $I_{D(CONT)}$ .....	-40°C to +125°C..... -50mA to 50mA
Current per Input into Source or Drain Pins when Signal Voltage Exceeds Recommended Operating Voltage, $I_{OK}$ .....	-50mA to 50mA
Injected Current into Single Off Switch Input, $I_{INJ}$ .....	-50mA to 50mA
Total Injected Current into All Off Switch Inputs Combined, $I_{INJ\_ALL}$ .....	-100mA to 100mA
Operating Ambient Temperature Range .....	-40°C to +125°C

**OVERSTRESS CAUTION**

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.

**ESD SENSITIVITY CAUTION**



This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

**DISCLAIMER**

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

# Automotive, Bidirectional 8:1, 5V, SGM4522Q 1-Channel Multiplexer with Injection Current Control

## PIN CONFIGURATIONS

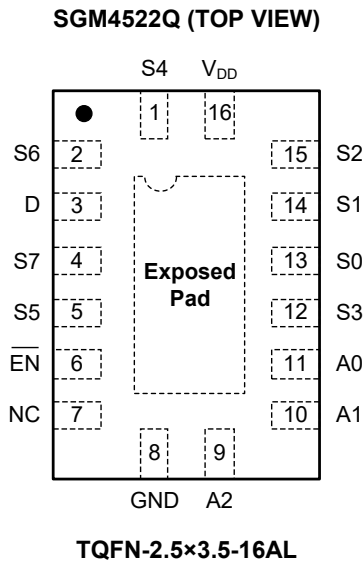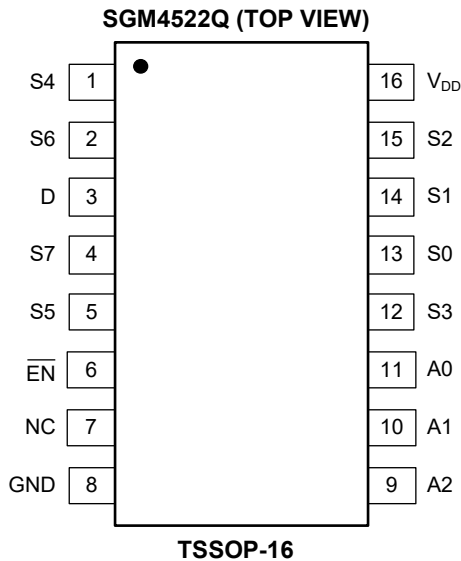


## PIN DESCRIPTION


PIN		NAME	FUNCTION
TSSOP-16	TQFN-2.5x3.5-16AL		
1	1	S4	Source Pin 4. Signal input or output path.
2	2	S6	Source Pin 6. Signal input or output path.
3	3	D	Drain Pin (Common Terminal). Signal input or output path.
4	4	S7	Source Pin 7. Signal input or output path.
5	5	S5	Source Pin 5. Signal input or output path.
6	6	$\overline{\text{EN}}$	Enable Control Input Pin (Active Low). When $\overline{\text{EN}}$ is set to high, common terminal is disconnected to any other signal ports and the switch is turned on.
7	7	NC	No Connection.
8	8	GND	Ground Pin.
9	9	A2	Digital Address A2 Pin.
10	10	A1	Digital Address A1 Pin.
11	11	A0	Digital Address A0 Pin.
12	12	S3	Source Pin 3. Signal input or output path.
13	13	S0	Source Pin 0. Signal input or output path.
14	14	S1	Source Pin 1. Signal input or output path.
15	15	S2	Source Pin 2. Signal input or output path.
16	16	V <sub>DD</sub>	Power Supply Pin. It is recommended to connect a 0.1 $\mu$ F to 10 $\mu$ F capacitor between V <sub>DD</sub> and GND to get good power supply decoupling.
—	Exposed Pad	Exposed Pad	Exposed Pad. It can be connected to GND or be left floating.

PACKAGE OUTLINE DIMENSIONS


TQFN-2.5×3.5-16AL




TOP VIEW




BOTTOM VIEW

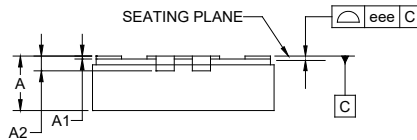

SIDE VIEW

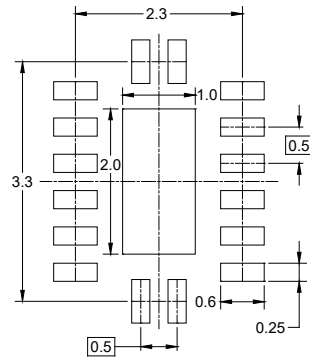

RECOMMENDED LAND PATTERN (Unit: mm)




Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	0.700	-	0.800
A1	0.000	-	0.050
A2	0.203 REF		
b	0.200	-	0.300
D	2.400	-	2.600
D1	0.900	-	1.100
E	3.400	-	3.600
E1	1.900	-	2.100
e	0.500 BSC		
k	0.350 REF		
L	0.300	-	0.500
eee	0.080		


NOTE: This drawing is subject to change without notice.

PACKAGE OUTLINE DIMENSIONS

TSSOP-16

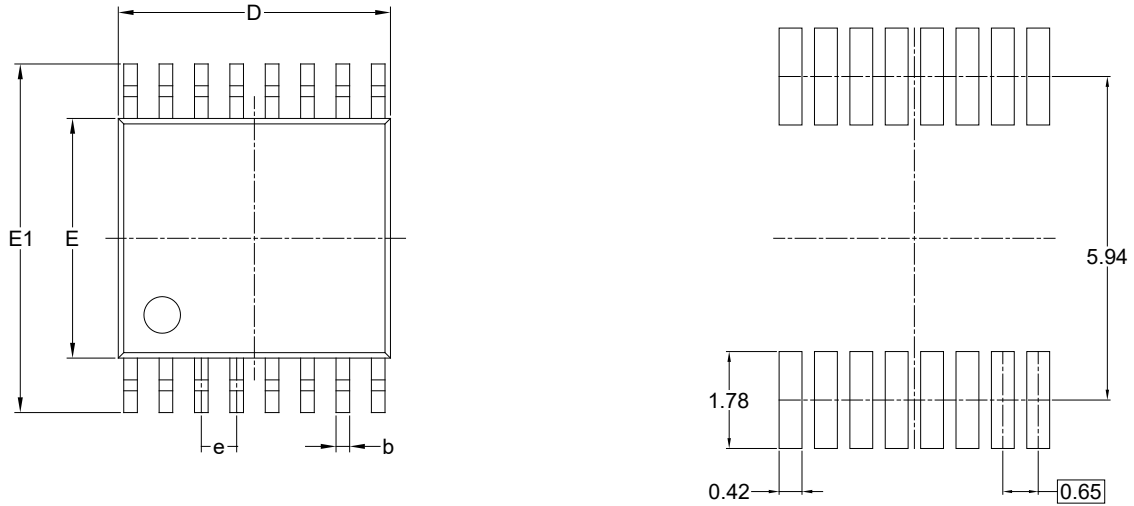

RECOMMENDED LAND PATTERN (Unit: mm)

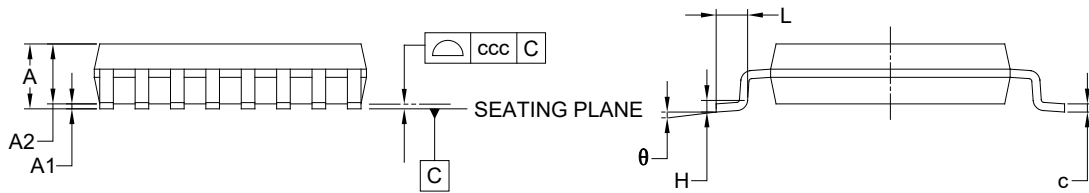

Symbol	Dimensions In Millimeters		
	MIN	MOD	MAX
A	-	-	1.200
A1	0.050	-	0.150
A2	0.800	-	1.050
b	0.190	-	0.300
c	0.090	-	0.200
D	4.860	-	5.100
E	4.300	-	4.500
E1	6.200	-	6.600
e	0.650 BSC		
L	0.450	-	0.750
H	0.250 TYP		
θ	0°	-	8°
ccc	0.100		

NOTES:

1. This drawing is subject to change without notice.
2. The dimensions do not include mold flashes, protrusions or gate burrs.
3. Reference JEDEC MO-153.

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
TSSOP-16	13"	12.4	6.80	5.40	1.50	4.0	8.0	2.0	12.0	Q1
TQFN-2.5×3.5-16AL	13"	12.4	2.80	3.80	1.13	4.0	4.0	2.0	12.0	Q1

DD0001

# PACKAGE INFORMATION

## CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

## KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
13"	386	280	370	5

DD0002